

General Disclaimer

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.

EXPERIMENT REQUIREMENTS DOCUMENT
FOR
REFLIGHT OF THE
SMALL HELIUM-COOLED
INFRARED TELESCOPE EXPERIMENT

NAS5-26097

(NASA-CR-170379) EXPERIMENT REQUIREMENTS
DOCUMENT FOR REFLIGHT OF THE SMALL
HELIUM-COOLED INFRARED TELESCOPE EXPERIMENT
(Smithsonian Astrophysical Observatory)
102 p HC A06/MF A01

N83-26770

Unclas

CSSL 03A G3/89 11845

PREPARED FOR

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
GODDARD SPACE FLIGHT CENTER
GREENBELT, MARYLAND 20771

BY

SMITHSONIAN INSTITUTION
ASTROPHYSICAL OBSERVATORY
60 GARDEN STREET
CAMBRIDGE, MASSACHUSETTS 02138

The Smithsonian Astrophysical Observatory
and the Harvard College Observatory
are members of the
Center for Astrophysics

ORIGINAL PAGE IS
OF POOR QUALITY

EXPERIMENT REQUIREMENTS DOCUMENT FOR IRT REFLIGHT

TABLE OF CONTENTS

		<u>Page</u>
1.0	General Information	1
1.1	Summary of Experiment Objectives	1
1.1.1	Astronomical Goals	1
1.1.2	Engineering Goals	3
1.1.3	Specific Goals of the Reflight Mission	4
1.2	Instrument Characteristics	5
1.2.1	The Telescope	5
1.2.2	The Cryogenic System	8
1.2.3	Electronics	9
1.2.4	Support Structure	9
1.3	Summary of Experimental Observa- tions	9
1.4	Mission Characteristics	13
2.0	Physical and Functional Requirements	14
2.1	Mechanical Interface Requirements	14
2.1.1	Drawings	14
2.1.2	Flight Equipment	21
2.1.3	Alignment Requirements	21
2.1.4	Deployment Requirements	21
2.2	Attitude Requirements	22
2.3	Electrical Requirements	24
2.3.1	Power Profiles	24
2.3.2	Connector Requirements	28
2.3.3	Additional Requirements	28
2.4	Thermal Control Requirements	29
2.4.1	Thermal Control Characteristics	29
2.4.2	Coatings and Coverings	29
2.4.3	Cold Plate Requirements	29
2.5	Command and Data Management	29
2.5.1	CDMS Interface	30
2.5.2	Experiment Inputs	31
2.5.3	Experiment Outputs	31

	2.5.4	Other	35
2.6		Service Requirements	35
	2.6.1	Pre-Level IV Requirements	35
	2.6.2	Level-IV Requirements	35
	2.6.3	Level-I Requirements	36
3.0		Experiment Operational Procedures	37
	3.1	Test Procedures	37
	3.2	Monitoring Requirements	37
	3.3	Operational Procedures	38
		3.3.1 Command and Command Sequences	38
		3.3.2 Coordination of Commands with Other Events	39
		3.3.3 Limit Conditions	40
	3.4	Displays	40
4.0		Facilities and Support Requirements	47
	4.1	Installation and Assembly Requirements	47
	4.2	Special Preparation	47
	4.3	On-Line Activities	48
		4.3.1 Precautions	48
		4.3.2 Special Requirements	48
	4.4	NASA-Provided Support Equipment	48
5.0		Preflight Operations Requirements	49
	5.1	Access Requirements	50
	5.2	Special Support Requirements	51
6.0		Flight Requirements	52
	6.1	Operating Modes	52
		6.1.1 Typical Timeline Description	55
	6.2	Targets and Viewing Constraints	57
	6.3	Ancillary Parameter Requirements	57
	6.4	Flight Environment Sensitivity Limits	62
	6.5	Vehicle Motion Limits	62
	6.6	Payload Specialist Requirements	63
	6.7	Special Support Requirements	63
7.0		Postflight Equipment Requirements	64
	7.1	Access	64
	7.2	Deintegration Requirements	64
Appendix A.		IRT-109D, "Command and Housekeeping Definition"	
Appendix B.		IRT-116, "HRM Format Description"	

ORIGINAL PAGE IS
OF POOR QUALITY

EXPERIMENT REQUIREMENTS DOCUMENT FOR IRT REFLIGHT

FIGURES AND TABLES

	<u>Page</u>
Figure 1.2-1.	IRT Experiment Block Diagram . . . 6
Figure 1.2-2.	IRT Optical Layout 7
Figure 2.1.1-1.	Pallet-Mounted Components 15
Figure 2.1.1-2.	Telescope Assembly (View A-A) . . 16
Figure 2.1.1-3.	Telescope Assembly (View B-B) . . 17
Figure 2.1.1-4.	IRT Electronics Assemblies 18
Figure 2.1.1-5.	Angular Momentum Exchange 20
Figure 2.2-1.	Telescope scan pattern in relation to the Spacelab 23
Figure 2.3.1-1.	IRT Power Profile: Nominal Case 25
Figure 2.3.1-2.	IRT Power Profile: Worst Case 26
Figure 2.3.1-3	IRT Power Profile: Non-Scanning Modes 27
Figure 2.5.3-1.	HRM Frame Format 1 32
Figure 2.5.3-2.	HRM Frame Format 2 33
Figure 2.5.3-3.	HRM Frame Format 3 34
Figure 6.2-1.	Telescope Motion Envelope and Clear Field of View 60
Table 2.1.2-1.	Flight Equipment Properties . . . 21
Table 2.3.2-1.	Interface Connector Require- ments 28
Table 2.3.2-2.	Pin Designations 28
Table 2.5.1-1.	Experiment/CDMS Interface 30
Table 3.4-1.	Prelaunch Ground Displays 42
Table 3.4-2.	Aft Flight Deck Displays 44
Table 6.1-1.	Instrument Operating Mode Requirements 54
Table 6.1-2.	Pointing Performance Require- ments 58
Table 6.1-3.	Pointing Service Require- ments 59
Table 6.3-1.	Ancillary Parameter Require- ments 61
Table 6.4-1.	Flight Environment Limits 62

1.0 GENERAL INFORMATION

ORIGINAL PAGE IS
OF POOR QUALITY

1.1 SUMMARY OF EXPERIMENT OBJECTIVES

1.1.1 Astronomical Goals -

Virtually our entire knowledge of the infrared sky pertains to relatively compact spatial structures. The space environment should permit study of large-scale structures; however, currently planned space projects for infrared astronomy -- including the IRAS sky survey -- emphasize study of compact sources. The small, cryogenically cooled, scanning telescope described here will be ideal for measuring extended sources, thereby complementing the program planned for IRAS.

This experiment addresses four astronomical objectives:

a. The measurement and mapping of extended low surface-brightness infrared emission from the galaxy. Extended far infrared radiation from the galaxy was discovered in 1968 and has subsequently been measured over 50 degrees of galactic longitude to a surface brightness of $1 \times 10^{-11} \text{ W/cm}^2 / \text{ster}$ at 100 microns. The Spacelab-2 experiment, more than 500 times more sensitive than current balloon experiments at 100 microns, will make possible an extensive measurement of the quantity, distribution, and temperature of galactic dust. A new understanding of galactic structure will result, including spatial scales that are essentially unexplored in the infrared for our

galaxy, but which reproduce the spatial resolution of typical studies of external galaxies.

b. The measurement of diffuse emission from intergalactic material and/or galaxies and quasistellar objects. If observations of the diffuse radiation from clusters of galaxies are coordinated with the IRAS program so that selected clusters are well-observed at high and low spatial resolution, new information will be obtained on the intergalactic medium. Such observations will be particularly interesting when they pertain to clusters known to exhibit diffuse X-ray emission.

c. The measurement of the zodiacal dust emission. Calculations indicate that zodiacal dust emission is likely to produce the major contribution to the background over much of the far infrared, if the H_2O column density can be held to less than 1×10^{12} mol/cm². The scanning and absolute flux measurement capability of this experiment makes it possible to measure the zodiacal emission and to distinguish it from other sources by its spectral and spatial distribution.

d. The measurement of a large number of discrete infrared sources which overlap with the results of IRAS. In order to distinguish between a true diffuse emission and the effect of one or more discrete sources in the beam, it is necessary to include spatial filtering. This provides measurements of the flux, spectral characteristics,

positions, and sizes of discrete sources with a high sensitivity. Comparison of these results with those from IRAS will provide additional information on source spatial extent and source variability.

1.1.2 Engineering Goals -

Technical and engineering objectives are primarily concerned with the measurement of the natural and spacecraft-induced infrared background, and the determination of suitable procedures and techniques for the in-space use of superfluid helium and cryogenic telescopes. In particular, these objectives are:

a. To make environmental measurements of H_2O , CO_2 , and other infrared-active molecules, dust particles, and the effects of molecular deposition and cosmic rays; and to determine the effects of the induced Shuttle environment on the performance of cooled infrared telescopes.

b. To prove out the design of a cooled infrared telescope that can be applied to larger scale instruments (this includes, for example, the design of a sunshade and vacuum cover for a cooled telescope, and protection of cooled optics against condensates).

ORIGINAL PAGE IS
OF POOR QUALITY

c. To demonstrate the performance of a large superfluid helium dewar system and measure certain properties of superfluid helium in space. Such aspects of cryogenic technology to be investigated include the storage and control in space of a large volume of superfluid helium, the long-term zero-g operation of a porous plug, the transfer of refrigerant to a complex thermal load.

1.1.3 Specific Goals Of The Reflight Mission -

ORIGINAL PAGE IS
OF POOR QUALITY

The constraints of the SL-2 mission are such that in one flight we will not be able to complete a sky survey which includes all our prime astronomical targets, e.g., the galactic center, the galactic pole, the galactic plane, the ecliptic plane and pole, clusters of galaxies, and a search for extragalactic anisotropy. We expect about 30 hours of prime observing time during the SL-2 mission, i.e., observations under ideal conditions of minimum contamination and primary control of the Orbiter attitude. We will also not be able to observe within a radius of 35 degrees from the sun. Furthermore, if the launch of SL-2 occurs in winter we will not be able to observe the galactic center.

In terms of our engineering goals, although we will have acquired considerable data and experience on SL-2 on both contamination levels and operation of cryogenic systems, more observation time is needed on these subjects. It is important, for example, to know if the Orbiter- and

Spacelab-induced background radiation changes with each reflight. In the cryogenic system there will no doubt be minor changes in hardware and methods of operation that we shall wish to make and test.


ORIGINAL PAGE IS
OF POOR QUALITY

1.2 INSTRUMENT CHARACTERISTICS

The Infrared Telescope Experiment (IRT) is composed of four major subsystems. Together they comprise a cryogenically cooled, slow scanning telescope of 15.2-cm aperture designed to measure extended infrared sources, including any halo of induced environmental contamination surrounding the Shuttle Orbiter. The actively controlled helium system also permits testing various helium-control protocols in the space environment. A block diagram is given in Figure 1.2-1. Figure 1.2-2 shows the optical layout.

1.2.1 The Telescope -

The telescope is an $f/8$, 15.2-cm, highly-baffled Herschelian. The entire telescope is inside a cryostat and the mirror and lower telescope section are cooled to 8 K. The aluminum off-axis paraboloid mirror is gold-coated to provide an emissivity near 0.1. A low-emissivity specular sunshade protects the aperture, blocking off-axis radiation and limiting the thermal load on the upper telescope.

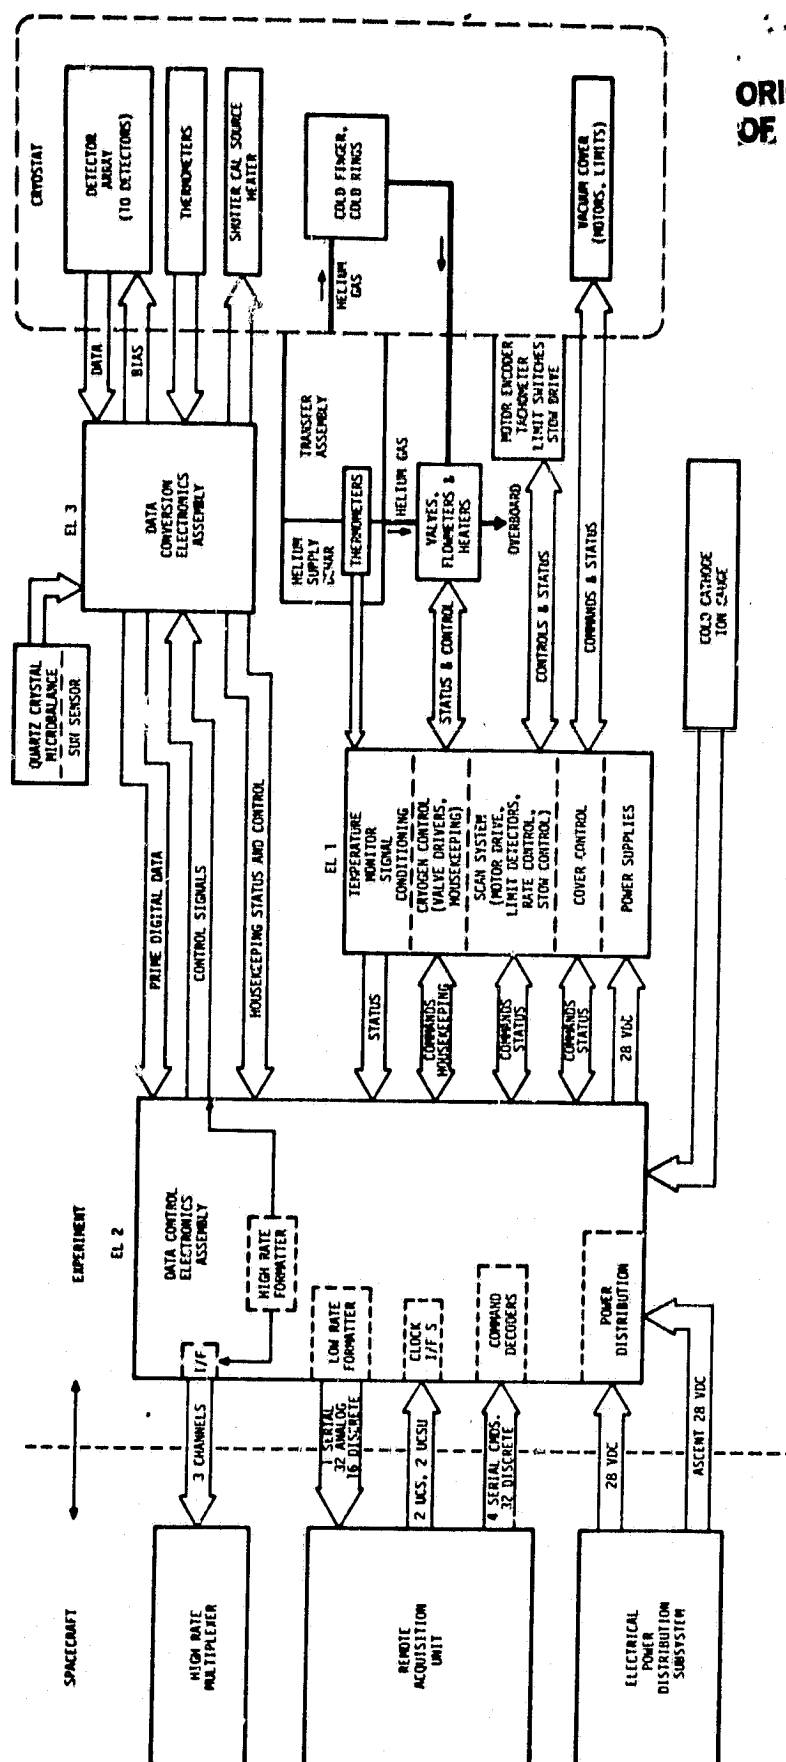

ORIGINAL PAGE IS
OF POOR QUALITY

Figure 1.2-1. IRT Experiment Block Diagram

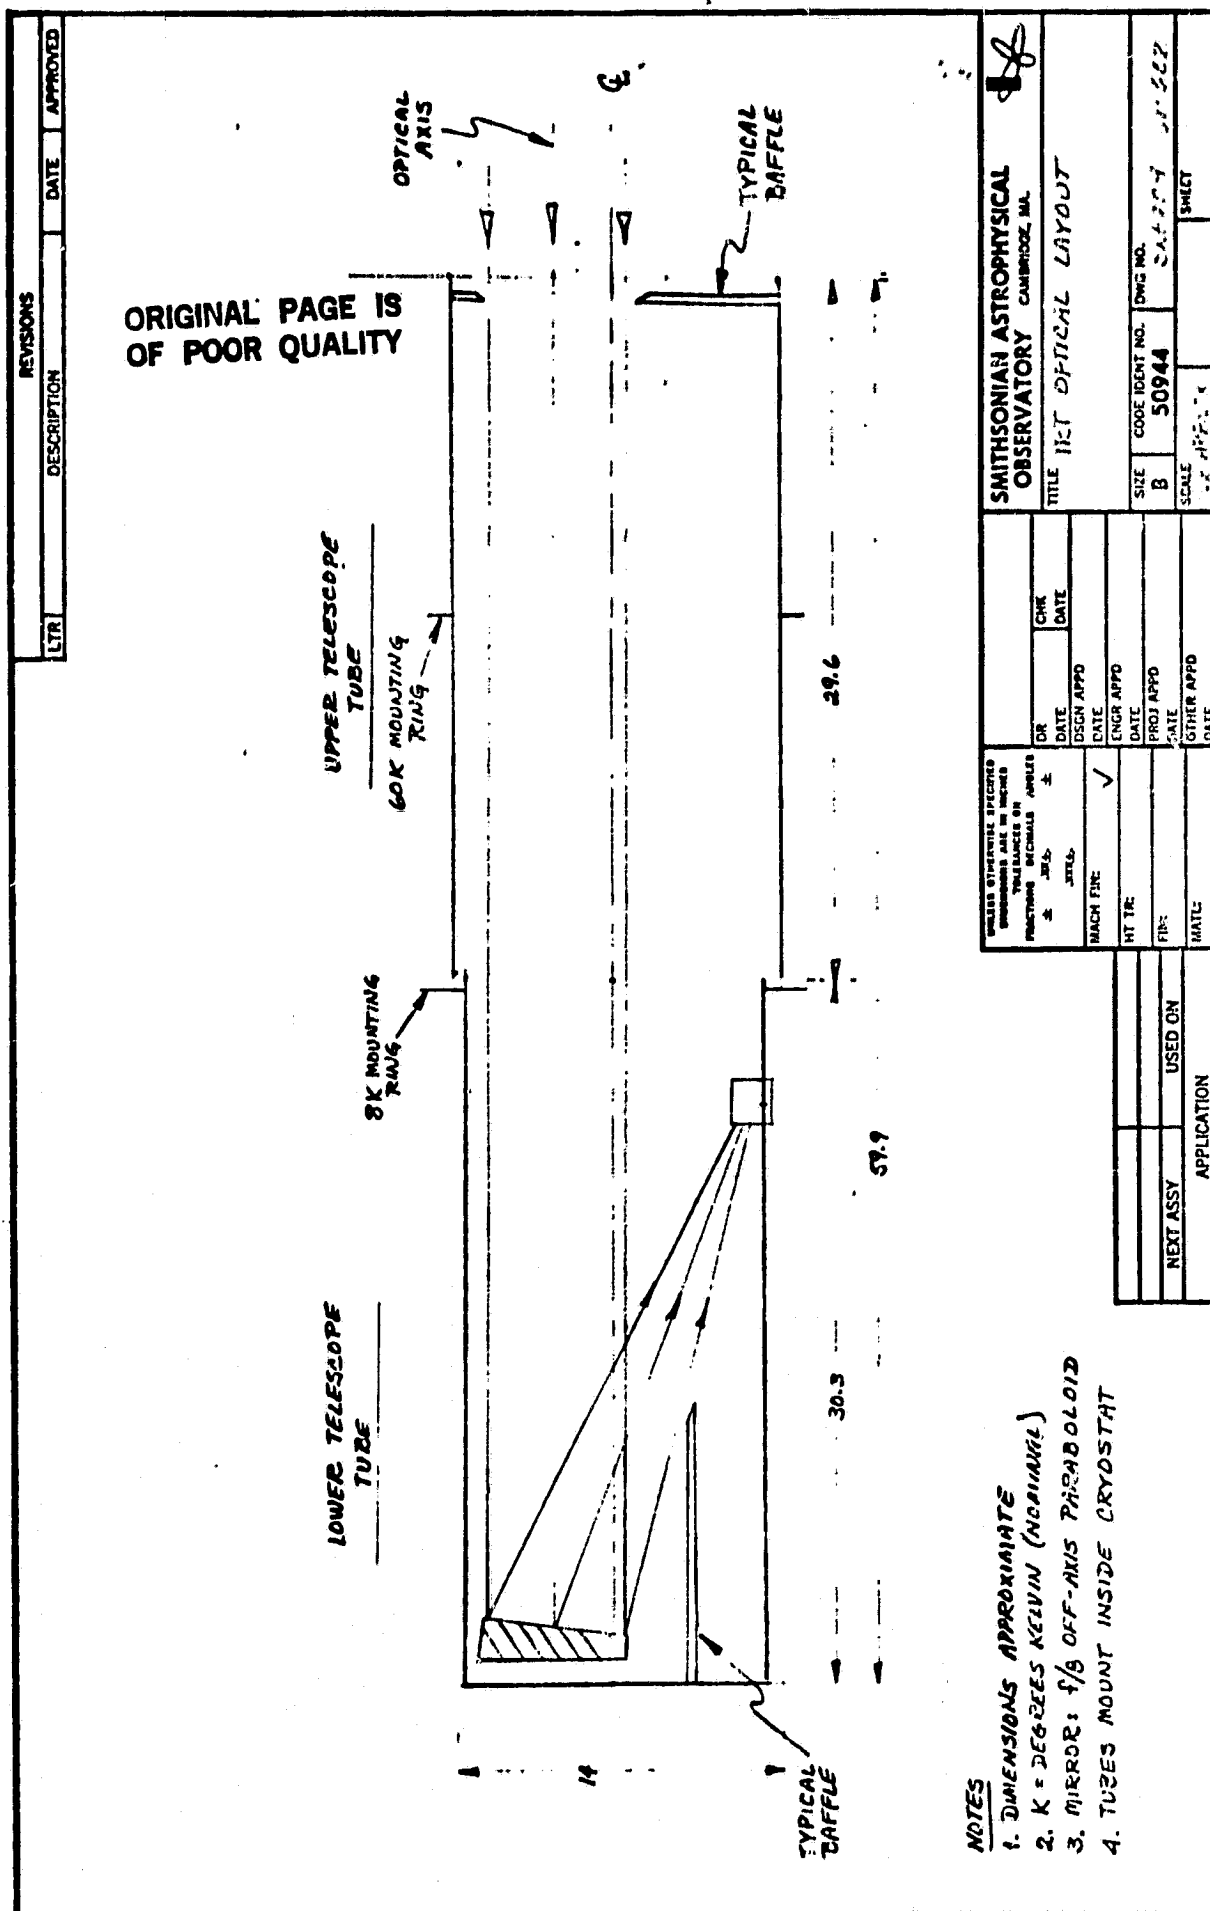


Figure 1.2-2. IRT Optical Layout

ORIGINAL PAGE IS
OF POOR QUALITY

The detector blocks consist of the detectors, with associated load resistors, Fabry lenses, aperture mask and bandpass filters. Nine of the discrete photoconductors are used to cover the wavelengths 4.5 - 120 microns in five bands, each having a 0.6 x 1.0-degree field of view. A single stellar detector is used for aspect determination. A cold finger attached to the detector blocks is used to maintain the detectors at less than 3 K. The focal-plane assembly also contains a shutter maintained at 8 K. A passively-cooled vacuum cover is used to close off the cryostat while on the ground or while on orbit during periods when excess buildup of contamination would occur.

The telescope is articulated by a single-axis scan-drive system, permitting it to scan over a 90-degree angle. A ferrofluidic seal maintains the vacuum integrity between the rotating cryostat and the pallet-mounted supply dewar.

1.2.2 The Cryogenic System -

Cold helium gas derived from 250 liters of superfluid provides refrigeration. Gas flows are regulated by actively controlled valves; a porous plug serves as the phase separator to confine the fluid to the storage dewar. The entire system is vacuum jacketed for thermal protection;

when in the atmosphere the cryostat containing the telescope is sealed and evacuated to prevent contaminants from freezing onto the baffles and optical elements.

ORIGINAL PAGE IS
OF POOR QUALITY

1.2.3 Electronics -

This system provides data from the telescope in an appropriate format, along with status information, to the HRM and RAU. It receives, decodes and executes commands from the RAU and operates the servo-controlled scan drive.

1.2.4 Support Structure -

This passive framework holds the other subsystems in the appropriate configuration and provides a mechanical interface with pallet hard points. All system elements are carried on the support structure except two cold-plate-mounted electronics boxes.

1.3 SUMMARY OF EXPERIMENTAL OBSERVATIONS

The required operational steps are collected into five groups called functional objectives. All commands can be originated from the AFD or POCC. Under normal operations the POCC is the preferred point of origin, except for the scan limits which are computed by the EC using the BOAA program.

Throughout this document Spacelab coordinates are used.
Hence the -X direction is toward the nose of the Orbiter.
See Figure 2.2-1.

FO NO.	FUNCTIONAL OBJECTIVE
1	<p>ACTIVATE</p> <p><u>Requirements:</u> Under normal conditions FO-1A must be accomplished by 12 hours. However, if the space vent valve V10 had not opened automatically, FO-1A must be accomplished prior to 4 hours to permit backup commanding of either V10 or V9 <u>OPEN</u>. FO-1B must be accomplished by 24 hours.</p>
1A	<p>TURN-ON (FROM AFD)</p> <p><u>Requirements:</u> Provide power and command capability to experiment. Ensure 28-Volt DC buss power is not on. Turn on RAU 22. Issue discrete outs 3-32 <u>OFF</u>. Turn on EPBD 28-Volt power buss to IRT. Verify discrete in 12. Issue discrete outs 17 through 23 and 31 <u>ON</u>, V1 adjust to TBD and V2 adjust to TBD.</p> <p><u>Note:</u> Cryogen adjusts will take place approximately every half hour after turn-on until the end of the mission.</p>
1B	<p>CHECK-OUT (FROM POCC)</p> <p><u>Requirements:</u> Validate the functioning of the various experiment components. Verify sun alarm and BOA algorithm (-XVV attitude), verify scan drive and sun avoidance (-XVV attitude), send backup scan limits from POCC, degas QCM.</p>
2	<p>STANDBY</p> <p><u>Requirements:</u> To maintain the experiment in readiness for data taking. The experiment will then be in standby until an appropriate time for taking data. The standby objective may be achieved a number of times during the mission, for example, during the first 30 hours on orbit when SL is still heavily outgassing, or when water-vapor levels are too high because of water dumps.</p>

ORIGINAL PAGE IS
OF POOR QUALITY

FO NO.	FUNCTIONAL OBJECTIVE
3	<p data-bbox="411 761 526 795">OPERATE</p> <p data-bbox="411 825 1436 1115">The telescope will scan a 90-degree arc in a plane perpendicular to the Orbiter longitudinal axis. The scan rate has been selected with respect to the orbital rate such that the telescope's 3-degree field of view will, at the end of any given scan, overlap the start of the previous scan by about 1 degree. Thus in one orbit the telescope will view a continuous swath of sky 90 degrees wide, except where the scan may come within 35 degrees of the sun, moon, earth limb, or Shuttle surface (35 degrees), or within 75 degrees of the velocity vector.</p> <p data-bbox="411 1144 1419 1370"><u>Requirements:</u> To take data. To achieve the operate objective, a series of commands sent from the ground or from the aft flight deck would open the cover, scan the telescope, open and close the shutter as necessary, and exercise the calibration source. Coolant flow will be adjusted from time to time during both observing and nonobserving periods. The operate FO is divided into five subdivisions: 3A, 3B, 3C, 3D and 3E.</p>
3A	<p data-bbox="411 1404 795 1438">OBSERVE -- BASELINE DATA</p> <p data-bbox="411 1468 1436 1630"><u>Requirements:</u> With Orbiter in each of three specified attitudes (-XVV XLV, -XVV Z+30 degrees, and -XVV Z-30 degrees) take data on three sequential revolutions (total of 9 revs). It is not necessary, although desirable, to take data for the 3 attitudes on contiguous triplets of revolutions.</p>

ORIGINAL PAGE IS
OF POOR QUALITY

FO NO.	FUNCTIONAL OBJECTIVE
3B	<p>OBSERVE -- PRIME DATA TAKE</p> <p><u>Requirements:</u> Take as much data as possible on each revolution in sets of three revolutions throughout the mission for a total of at least 18 revs observing time beyond FO 3A.</p>
3C	<p>OBSERVE -- COORDINATED OBSERVING</p> <p><u>Requirements:</u> Take data in coordination with other experiments using spacecraft attitudes prescribed by them.</p>
3D	<p>OBSERVE -- MISCELLANEOUS OBSERVING</p> <p><u>Requirements:</u> Take data whenever spacecraft attitude and induced environment permit.</p>
3E	<p>OBSERVE -- CONTROLLED CONTAMINATION</p> <p><u>Requirements:</u> Observe contamination buildup during thruster firings, H₂O dumps, etc.</p>
4	<p>DEACTIVATE</p> <p><u>Requirements:</u> To prepare the experiment for deboost. The cryostat will be secured for reentry, excess helium vented, and all electric power turned off.</p>
5	<p>HELIUM MANAGEMENT TEST</p> <p><u>Requirements:</u> Permit liquid helium to warm to various temperatures above the lambda point; test repumping of system to operating temperature. These tests to be conducted late in the mission after primary infrared measurement program is completed.</p>

1.4 MISSION CHARACTERISTICS

The IRT has no firm requirements for mission characteristics. However, several are desirable.

1. The mission should be in a season of the year different from SL-2 so that the part of the sky lost in the sun's glare during SL-2 can be observed during the reflight.
2. If new moon occurs during the mission, infrared sky coverage can be maximized.
3. Data taken during passages through the South Atlantic Anomaly are vitiated by energetic particles striking the detectors, so orbits minimizing time in the SA Anomaly are desirable.

2.0 PHYSICAL AND FUNCTIONAL REQUIREMENTS

2.1 MECHANICAL INTERFACE REQUIREMENTS

2.1.1 Drawings -

Figures 2.1.1-1,-2,-3,and -4 show the flight system assemblies and give selected interface data. Figure 2.1.1-5 shows the angular momentum exchange each time the cryostat scan is reversed.

ORIGINAL PAGE IS
OF POOR QUALITY

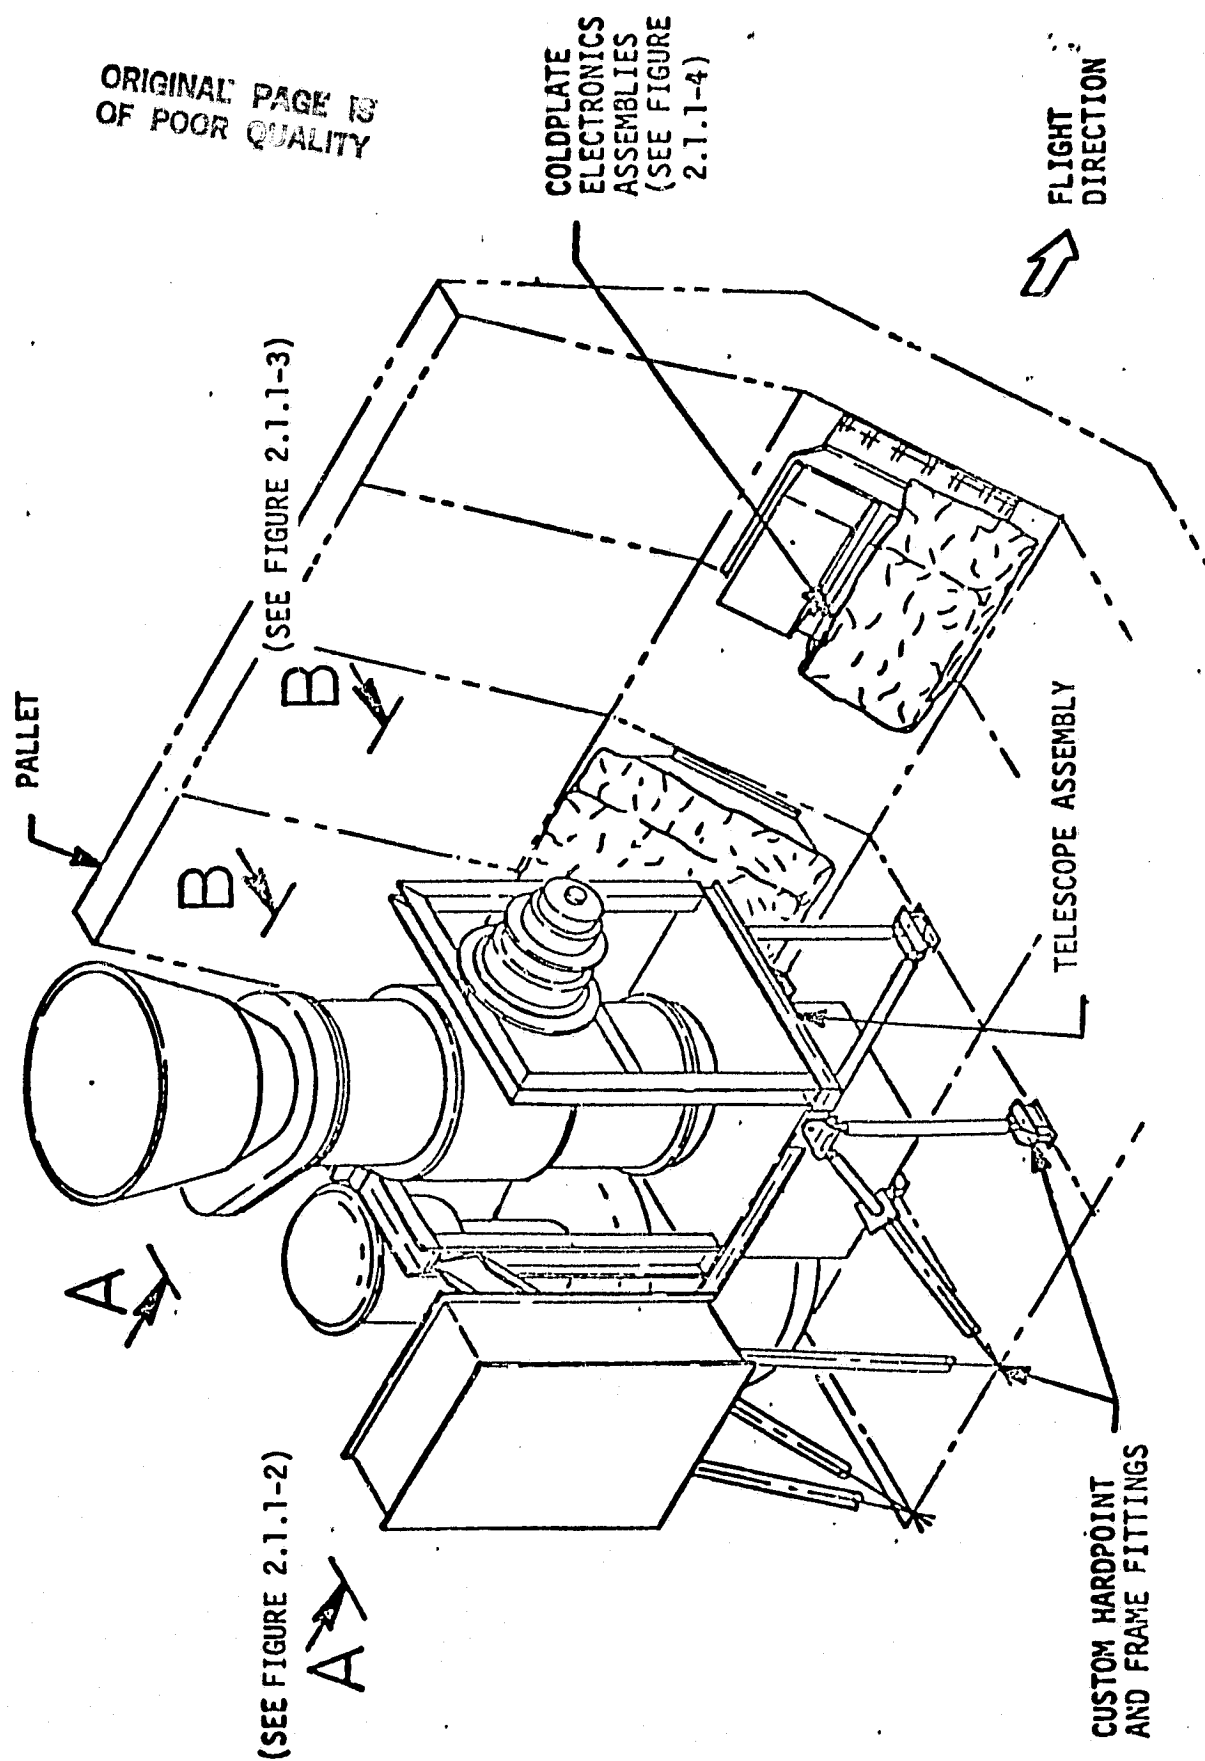


Figure 2.1.1-1. Pallet-Mounted Components


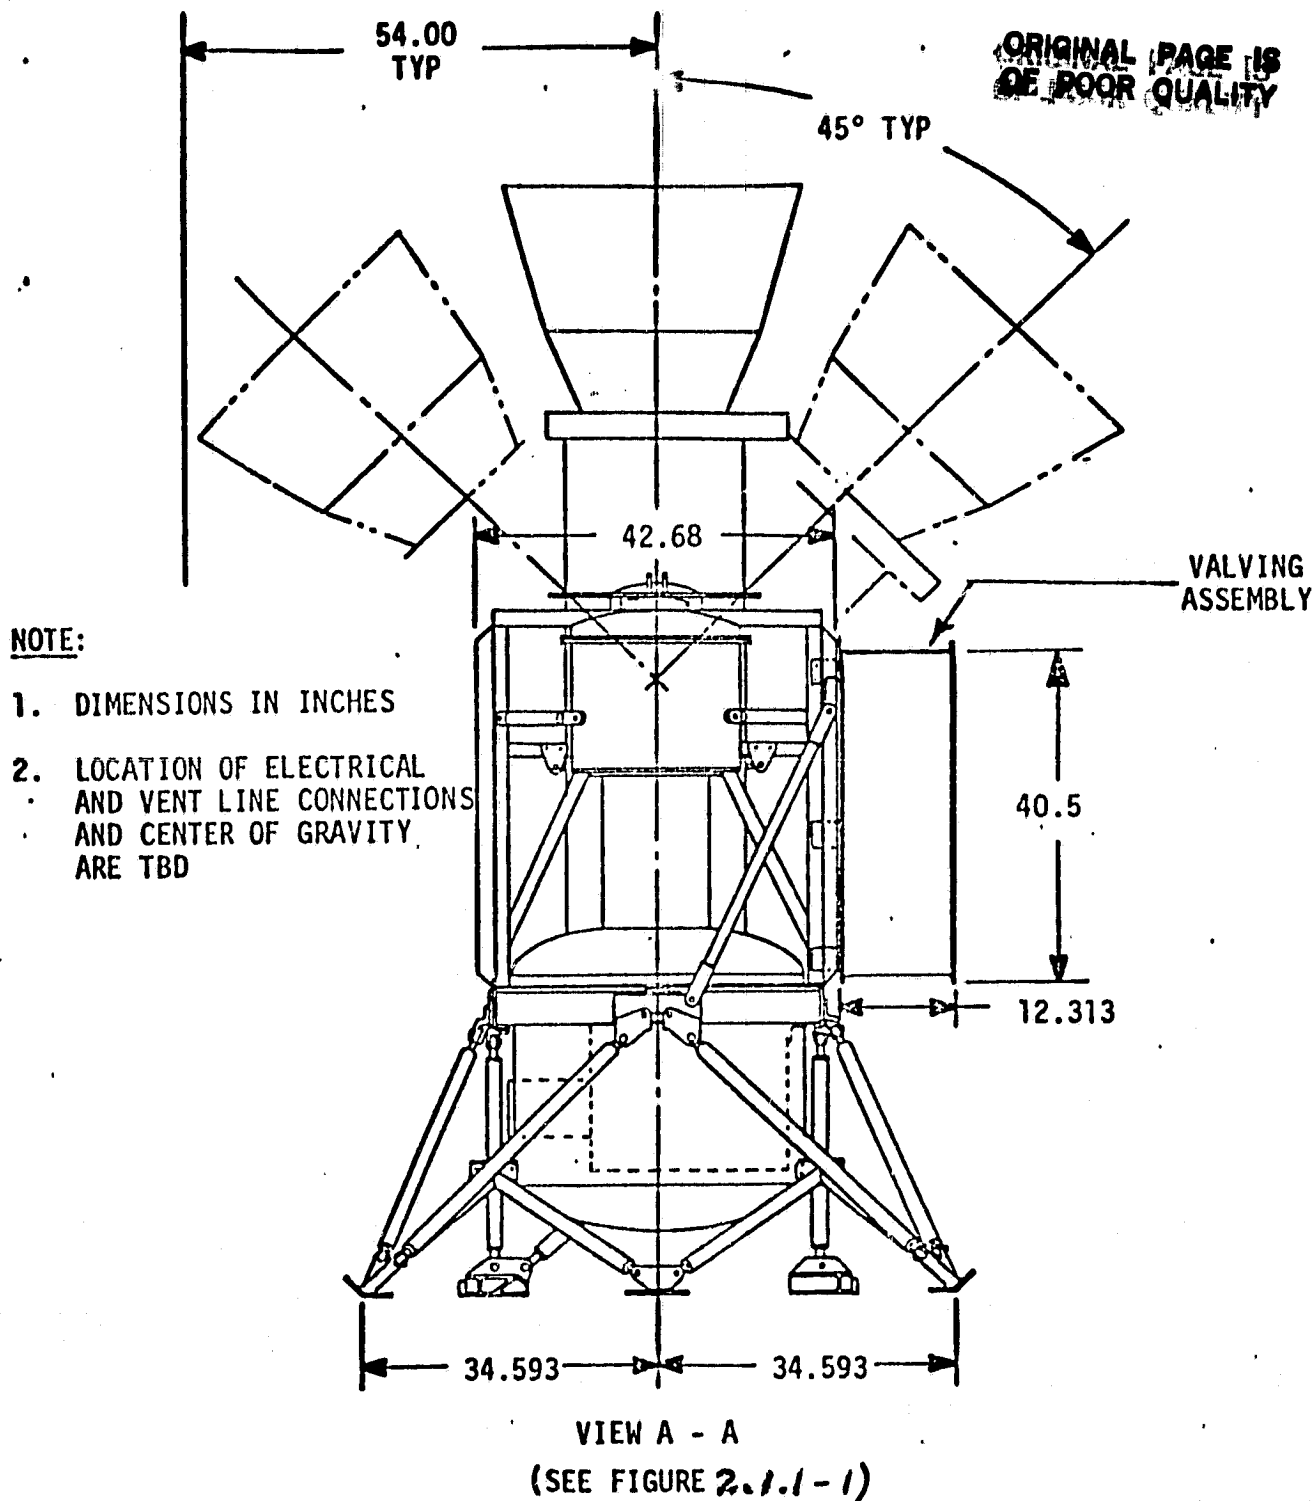


Figure 2.1.1-2. Telescope Assembly

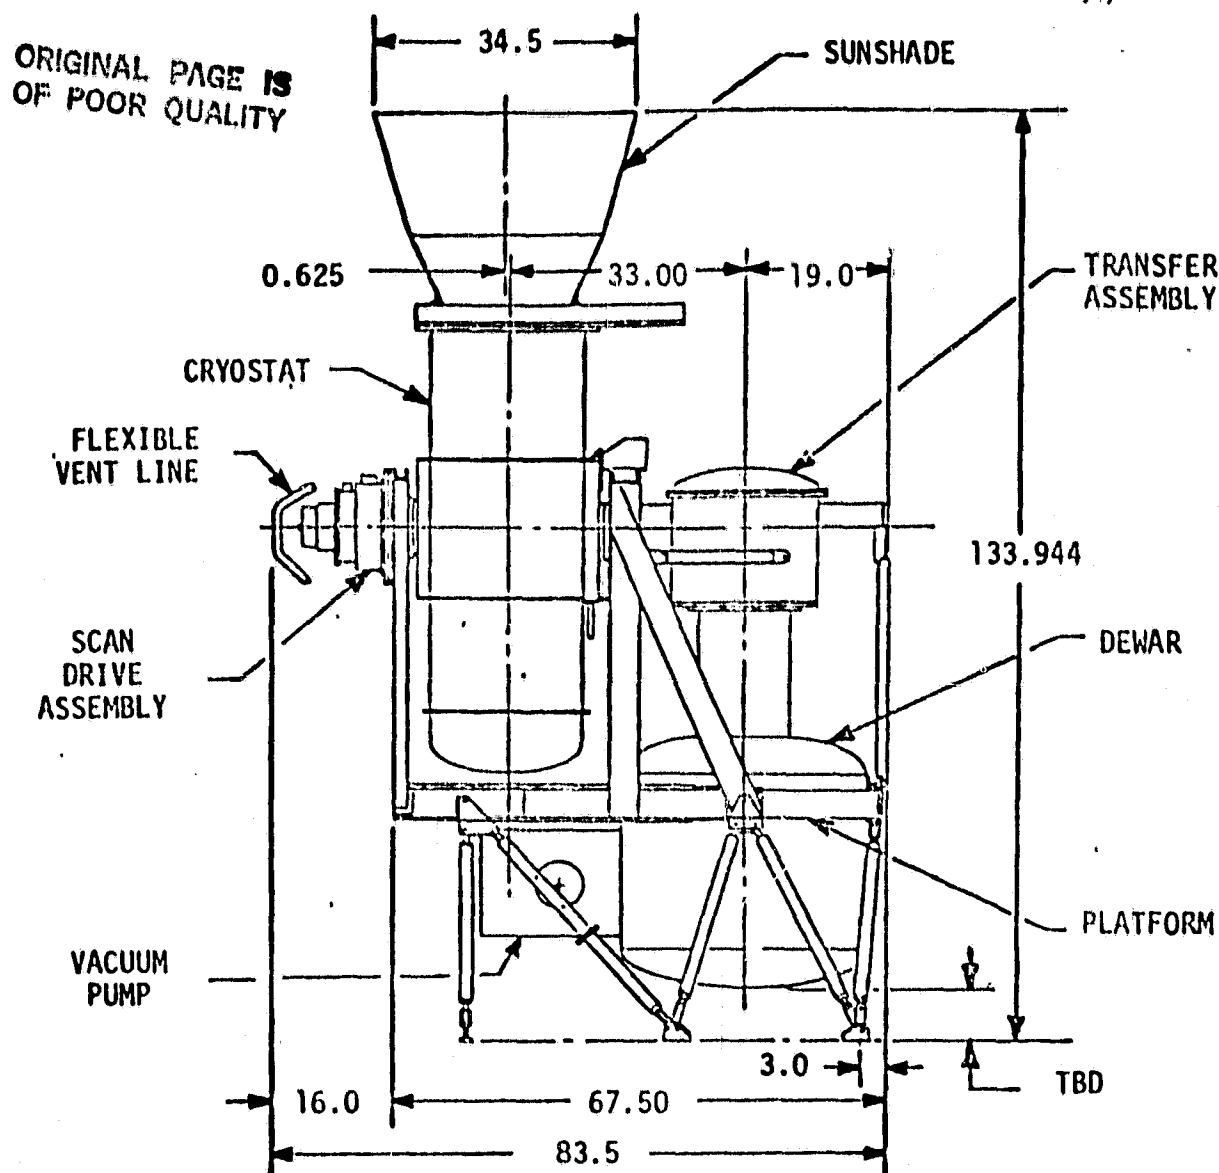


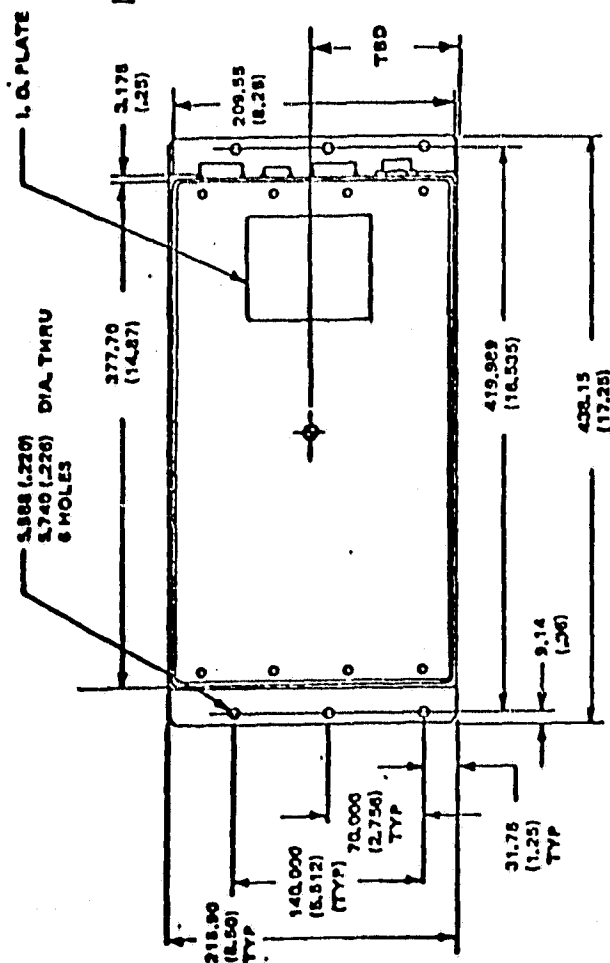
VIEW B - B
(SEE FIGURE 2.1.1-1)

NOTES:


1. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.
2. MOUNTING PROVISIONS ARE PROVIDED BY THE EXPERIMENTER TO REPLACE PALLET HARDPOINTS.
3. LOCATION OF ELECTRICAL AND VENT LINE CONNECTIONS AND CENTER OF GRAVITY ARE TBD.

Figure 2.1.1-3. Telescope Assembly


- NOTES:
1. DIMENSIONS ARE IN MM (IN.)
 2. TOLERANCES ON DIMENSIONS ARE:
.XX ± 0.508 MM (0.02 IN.)
.XXX ± 0.127 MM (0.005 IN.)
UNLESS OTHERWISE SPECIFIED.
 3. CENTER OF GRAVITY DESIGNATED BY 



ELECTRICAL
CONNECTORS

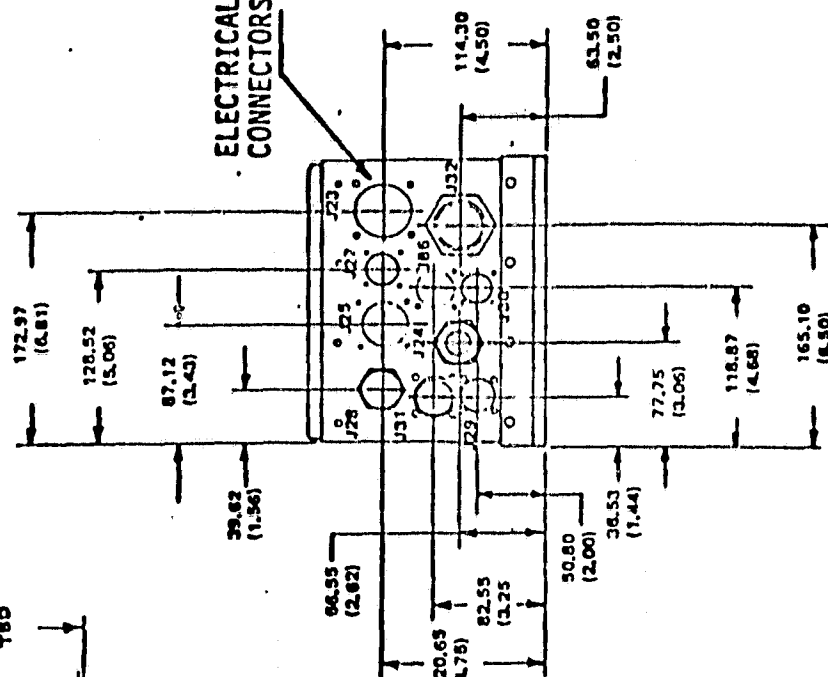

ORIGINAL PAGE IS
OF POOR QUALITY

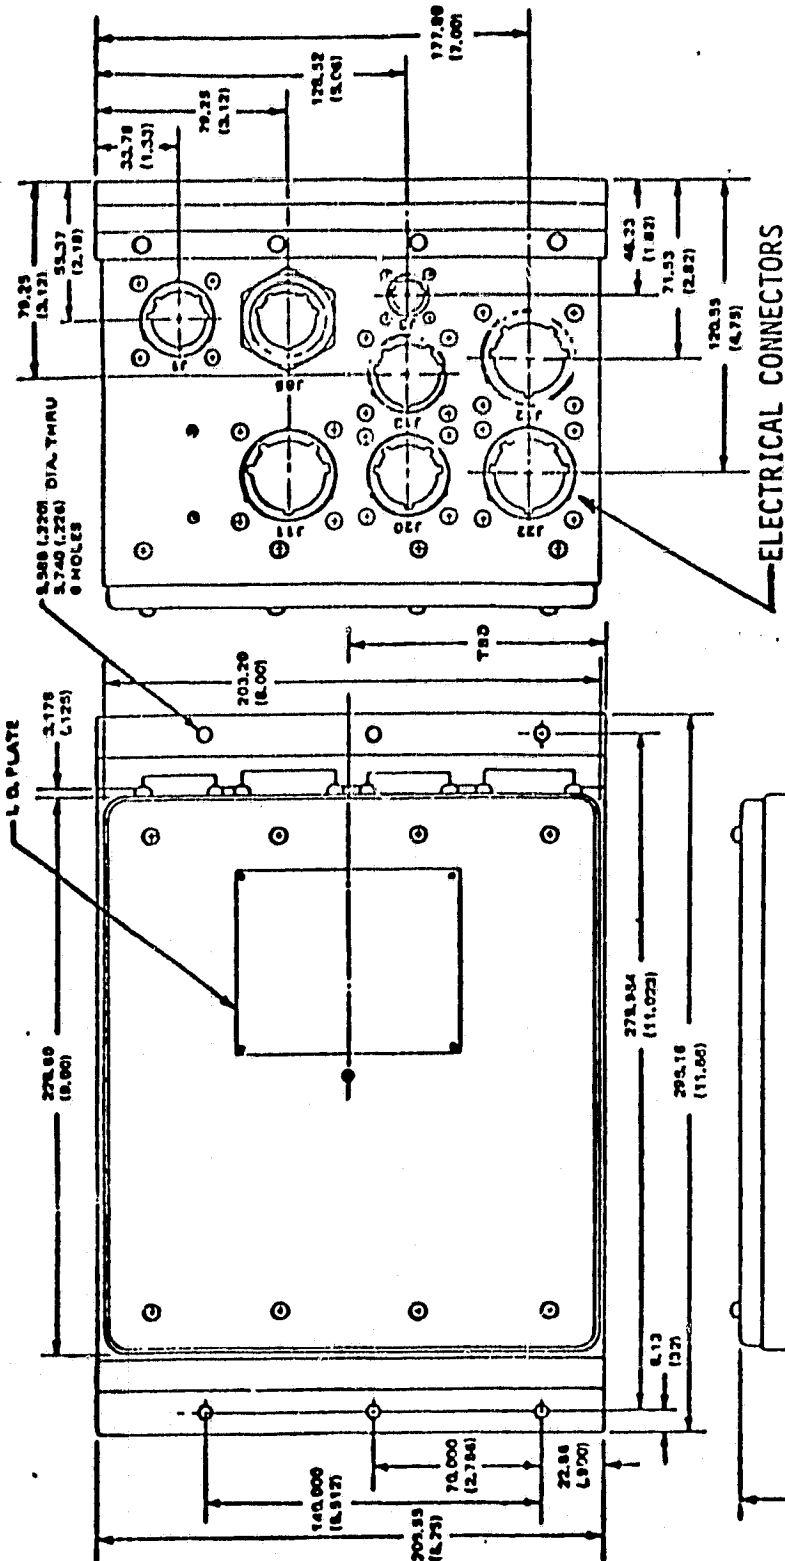

- NOTES:
1. DIMENSIONS ARE IN MM (IN.)
 2. TOLERANCES ON DIMENSIONS ARE:
.XX ± 0.508 MM (0.02 IN.)
.XXX ± 0.127 MM (0.005 IN.)
UNLESS OTHERWISE SPECIFIED BY
 3. CENTER OF GRAVITY DESIGNATED BY \odot

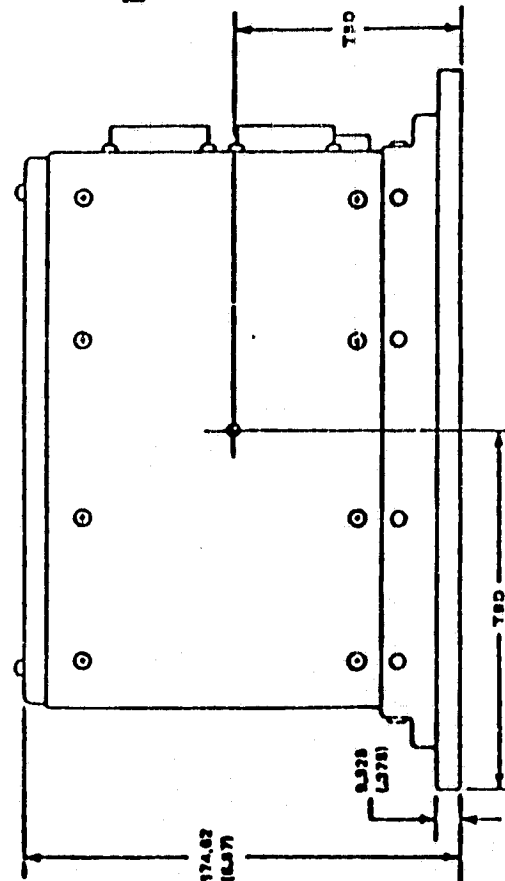


Figure 2.1.1-4. IRT Electronics Assemblies (sheet 2 of 2)

TBD

ORIGINAL PAGE IS
OF POOR QUALITY

Figure 2.1.1-5. Angular Momentum Exchange

2.1.2 Flight Equipment -

ORIGINAL PAGE IS
OF POOR QUALITY

Flight Equipment properties are shown in Table 2.1.2-1.

Table 2.1.2-1
Flight Equipment Properties

MODULE EQUIPMENT - NONE

PALLET EQUIPMENT

<u>ID No.</u>	<u>Nomenclature</u>	<u>Mass(kg)</u>	<u>Dimensions(in.)</u>	<u>Mounting</u>	<u>CG</u>
42A20140	IRT SYSTEM Telescope Assembly	751.5	83.5 x 69 x 134	Pallet Hardpoints	TBD
5061101	Electronics Box EL-1	9.1 (est.)	17 x 8.5 x 7	Cold Plate	TBD
5061202	Electronics Box EL-2	9.1 (est.)	12 x 8 x 7	Cold Plate	TBD

AFD EQUIPMENT - NONE

2.1.3 Alignment Requirements -

Bolt hole alignment is satisfactory.

2.1.4 Deployment Requirements -

Although the system has a stow pin it is not safety critical; there are no deployment requirements.

2.2 ATTITUDE REQUIREMENTS

To accomplish the scientific objectives of the experiment, that is, to produce large-scale infrared maps, it is necessary for this instrument to scan the sky about two axes. Figure 2.2-1 illustrates the solid angle scanned relative to the Orbiter. Precisely, the telescope is driven about a single axis which is parallel to the payload X-axis, that is, in the Y-Z plane. Nominally it scans within ± 45 degrees of the vertical, that is, 45 degrees from the payload X-Z plane. The scan rate is fixed at 6 deg/sec. The turnaround at the end of each scan is accomplished in 1 sec. The scan limits are variable so as to avoid bright infrared objects, such as the sun, moon, and earth. In concert with the telescope scan about the Orbiter X-axis, the Orbiter must continuously and uniformly pitch about its Y-axis so as to maintain the payload Y-Z plane (the scan plane) nominally parallel with the nadir (local vertical). This has been referred to as the airplane mode or -XVV,ZLV, that is, the X-axis along the velocity vector and Z-axis along the local vertical (nose first, payload pointing away from the earth).

ORIGINAL PAGE IS
OF POOR QUALITY

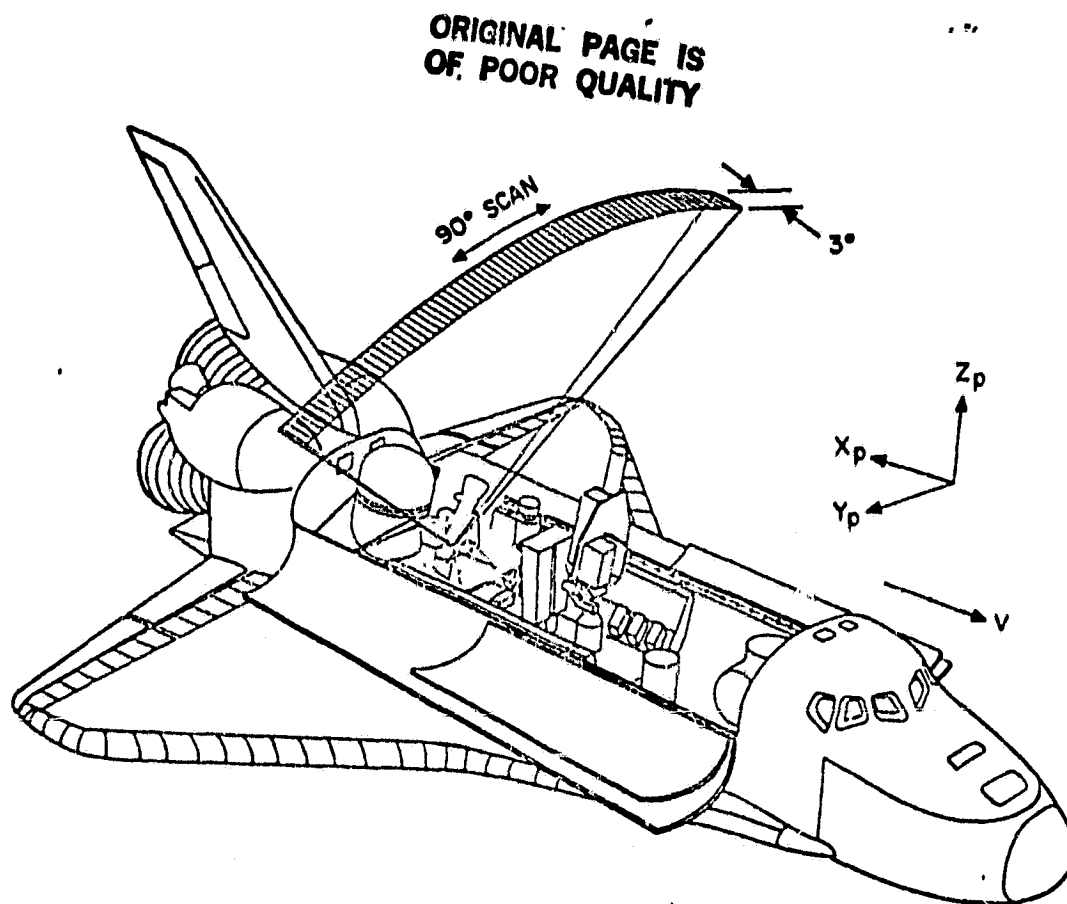


Figure 2.2-1. Telescope scan pattern in relation to the Spacelab; preferred orbital attitudes, $-XVV$ with ZLV and $Z \pm 30$.

To reduce contamination due to streaming of material into the telescope, it is required to have the nose slightly up, by about 2.5 degrees, i.e., $-XVV+2.5$.

In order to map as much of the sky as possible in a single mission it is required to roll the Orbiter ± 30 degrees about the X-axis, providing coverage of a 150-degree band of the sky centered on the orbital plane, exclusive of the sun (and new moon). These attitudes are referred to as -XVV+2.5,ZLV+30 and -XVV+2.5,ZLV-30, along with -XVV+2.5,ZLV.

These three attitudes are required to carry out the primary scientific objectives.

ORIGINAL PAGE IS
OF POOR QUALITY

2.3 ELECTRICAL REQUIREMENTS

2.3.1 Power Profiles -

Figures 2.3.1-1, 2.3.1-2 and 2.3.1-3 are typical IRT power profiles. Note that these apply to the electrical configuration for Spacelab 2. An electronics change under consideration may result in a somewhat different profile. No equipment is on the AFD. There is no profile for FO4 because no power is consumed.

ORIGINAL PAGE IS
OF POOR QUALITY

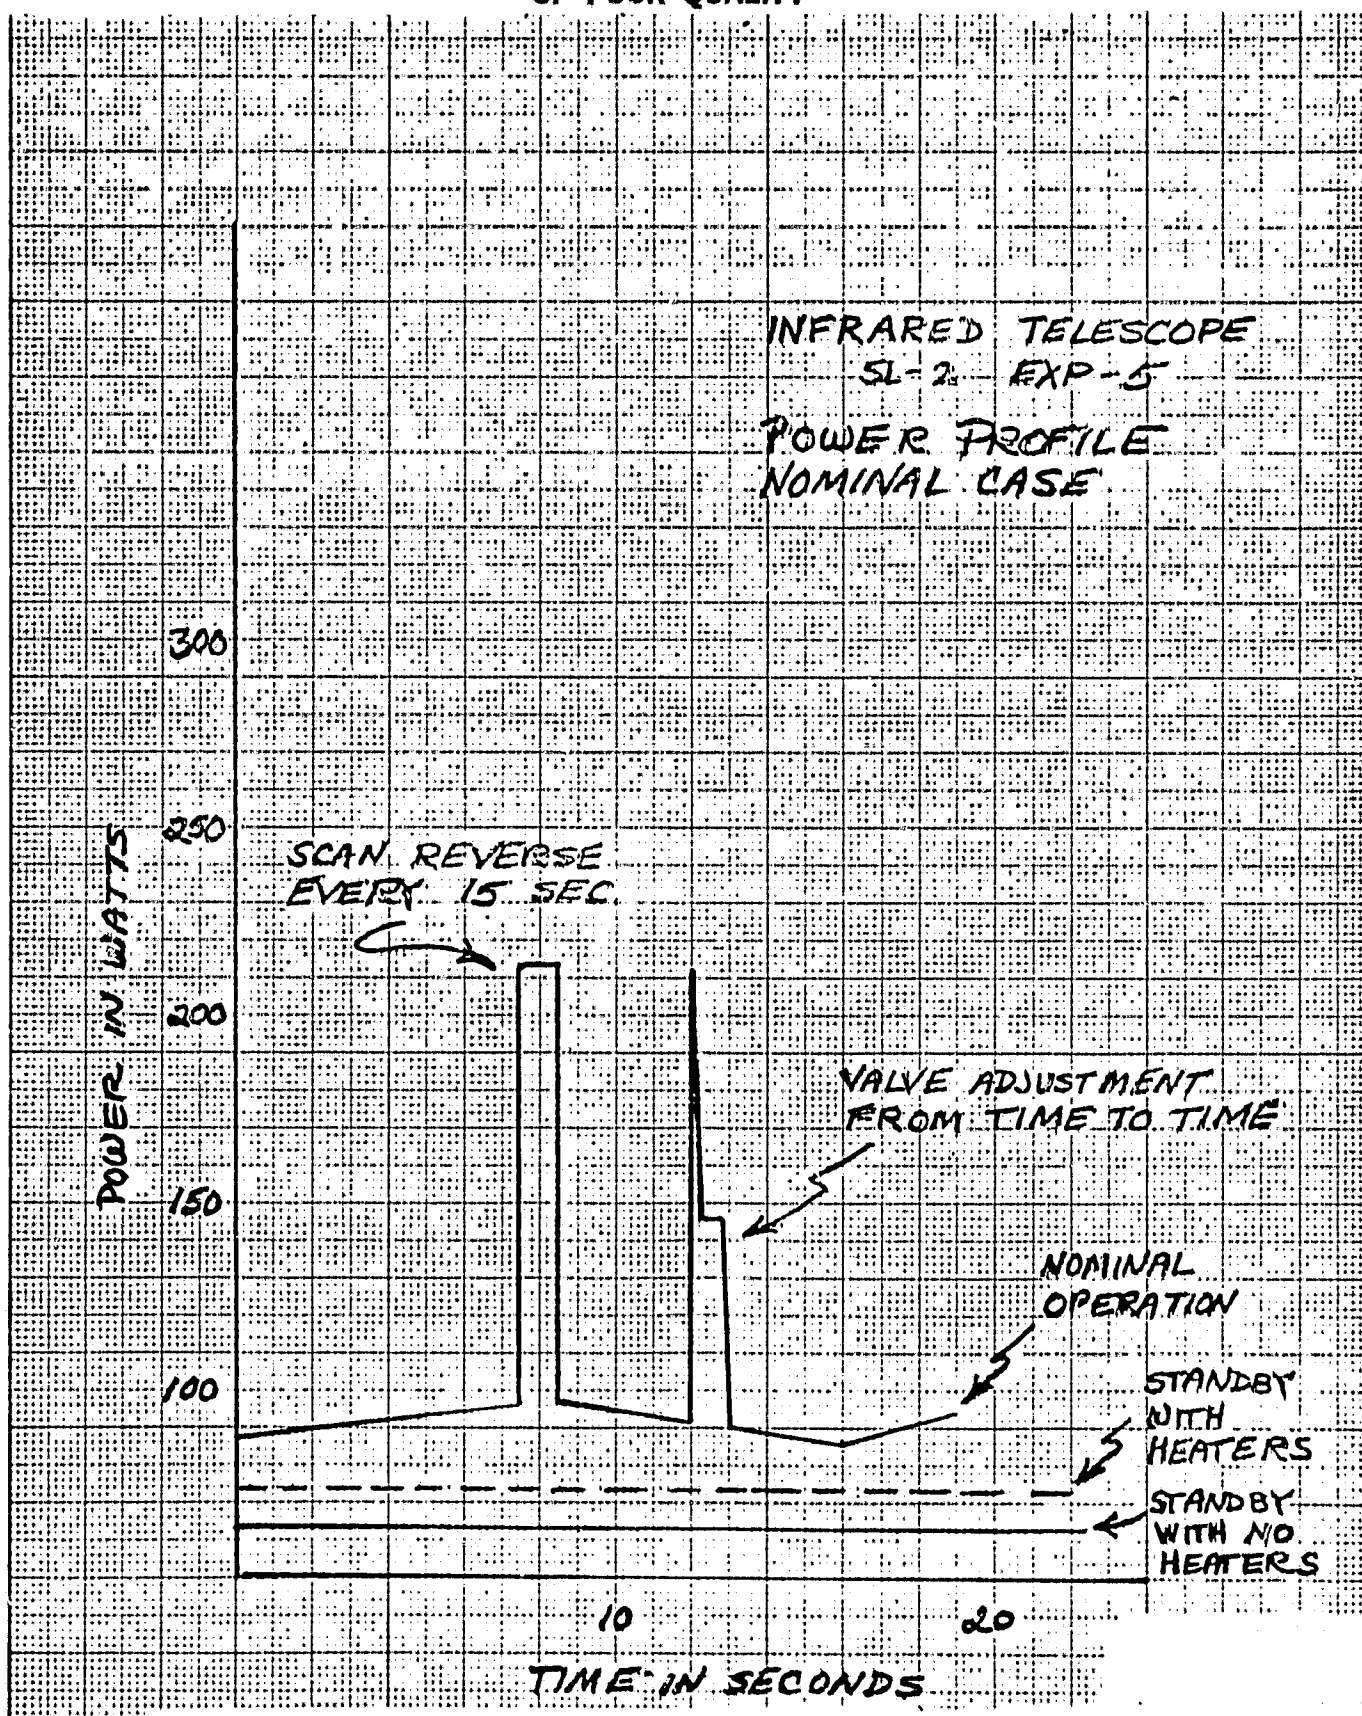


Figure 2.3.1-1. IRT Power Profile: Nominal Case

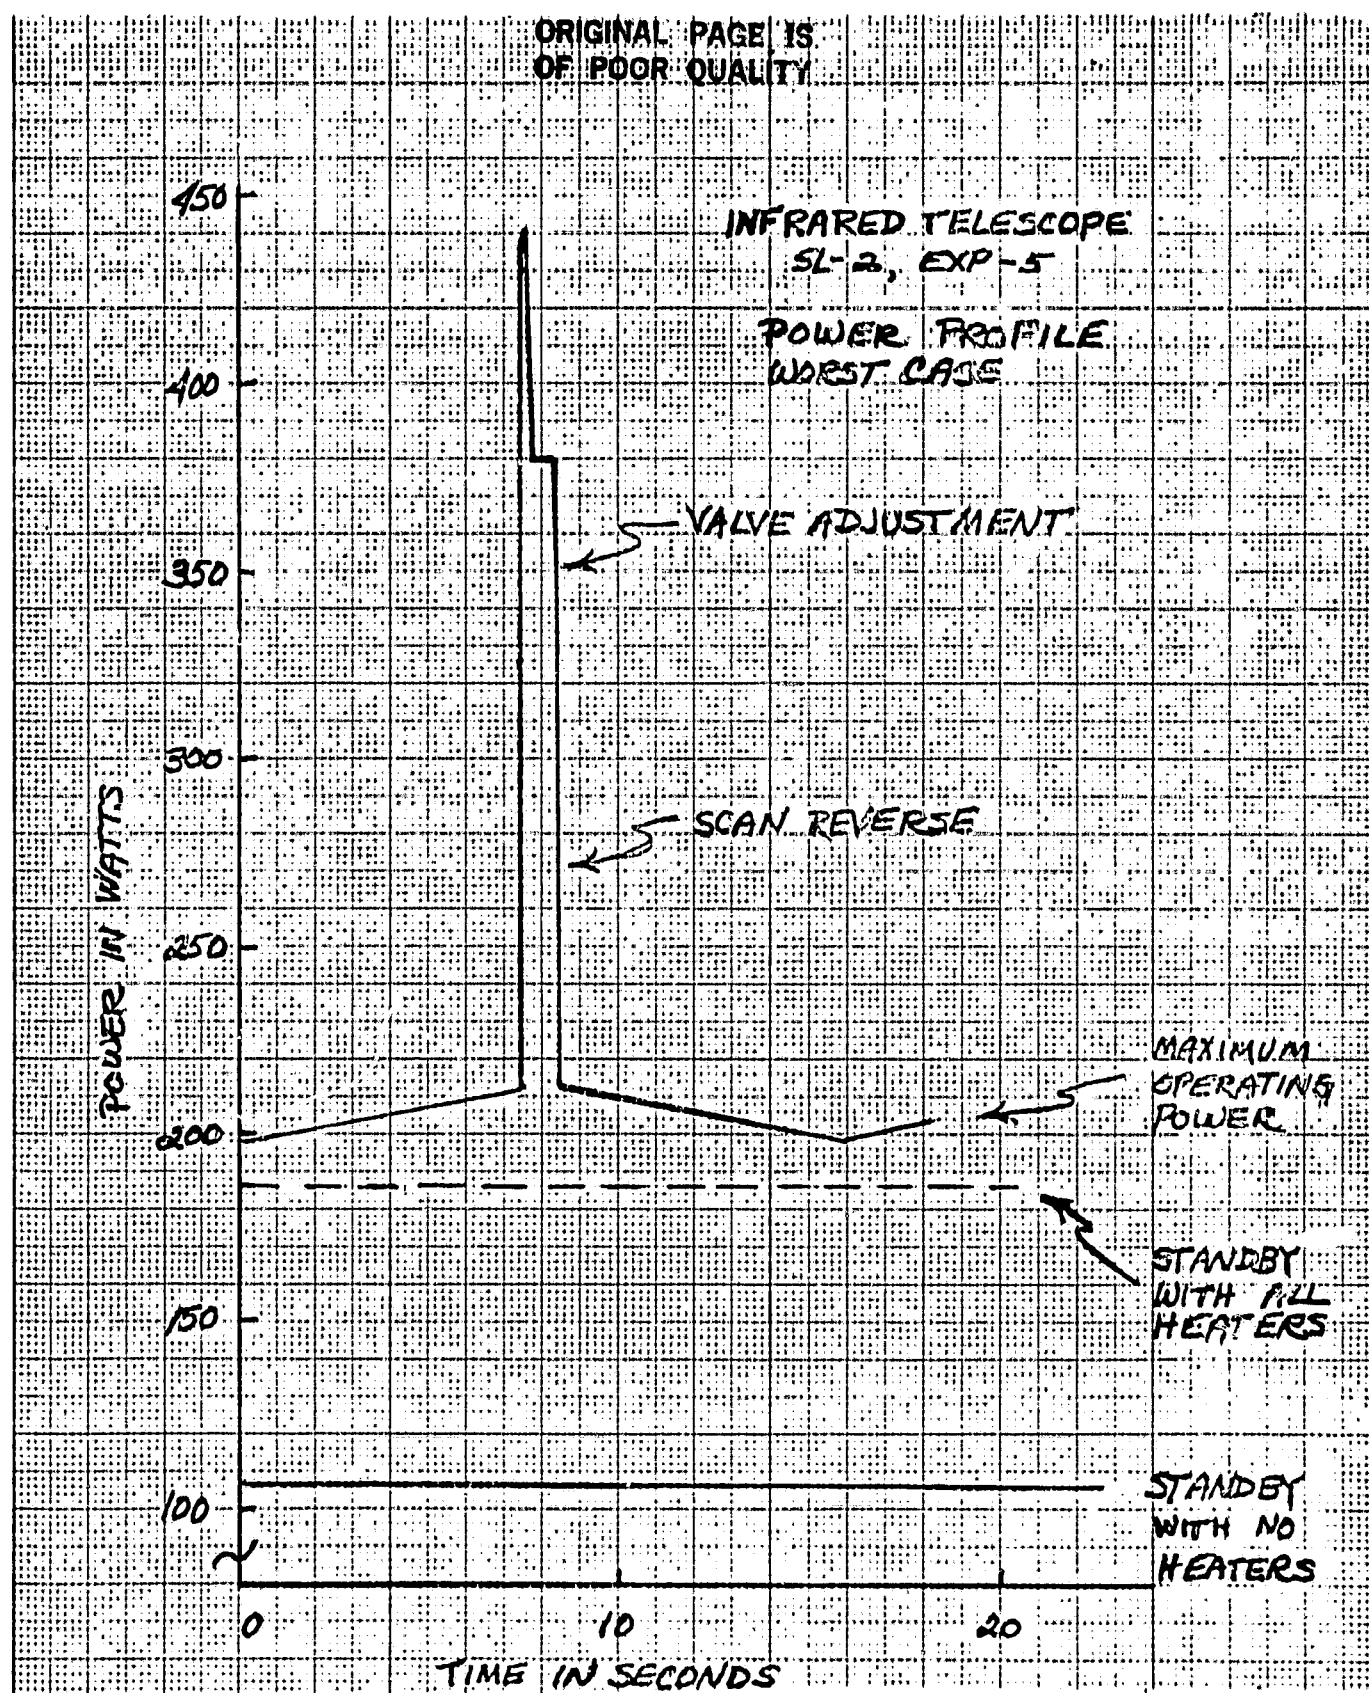


Figure 2.3.1-2. IRT Power Profile: Worst Case

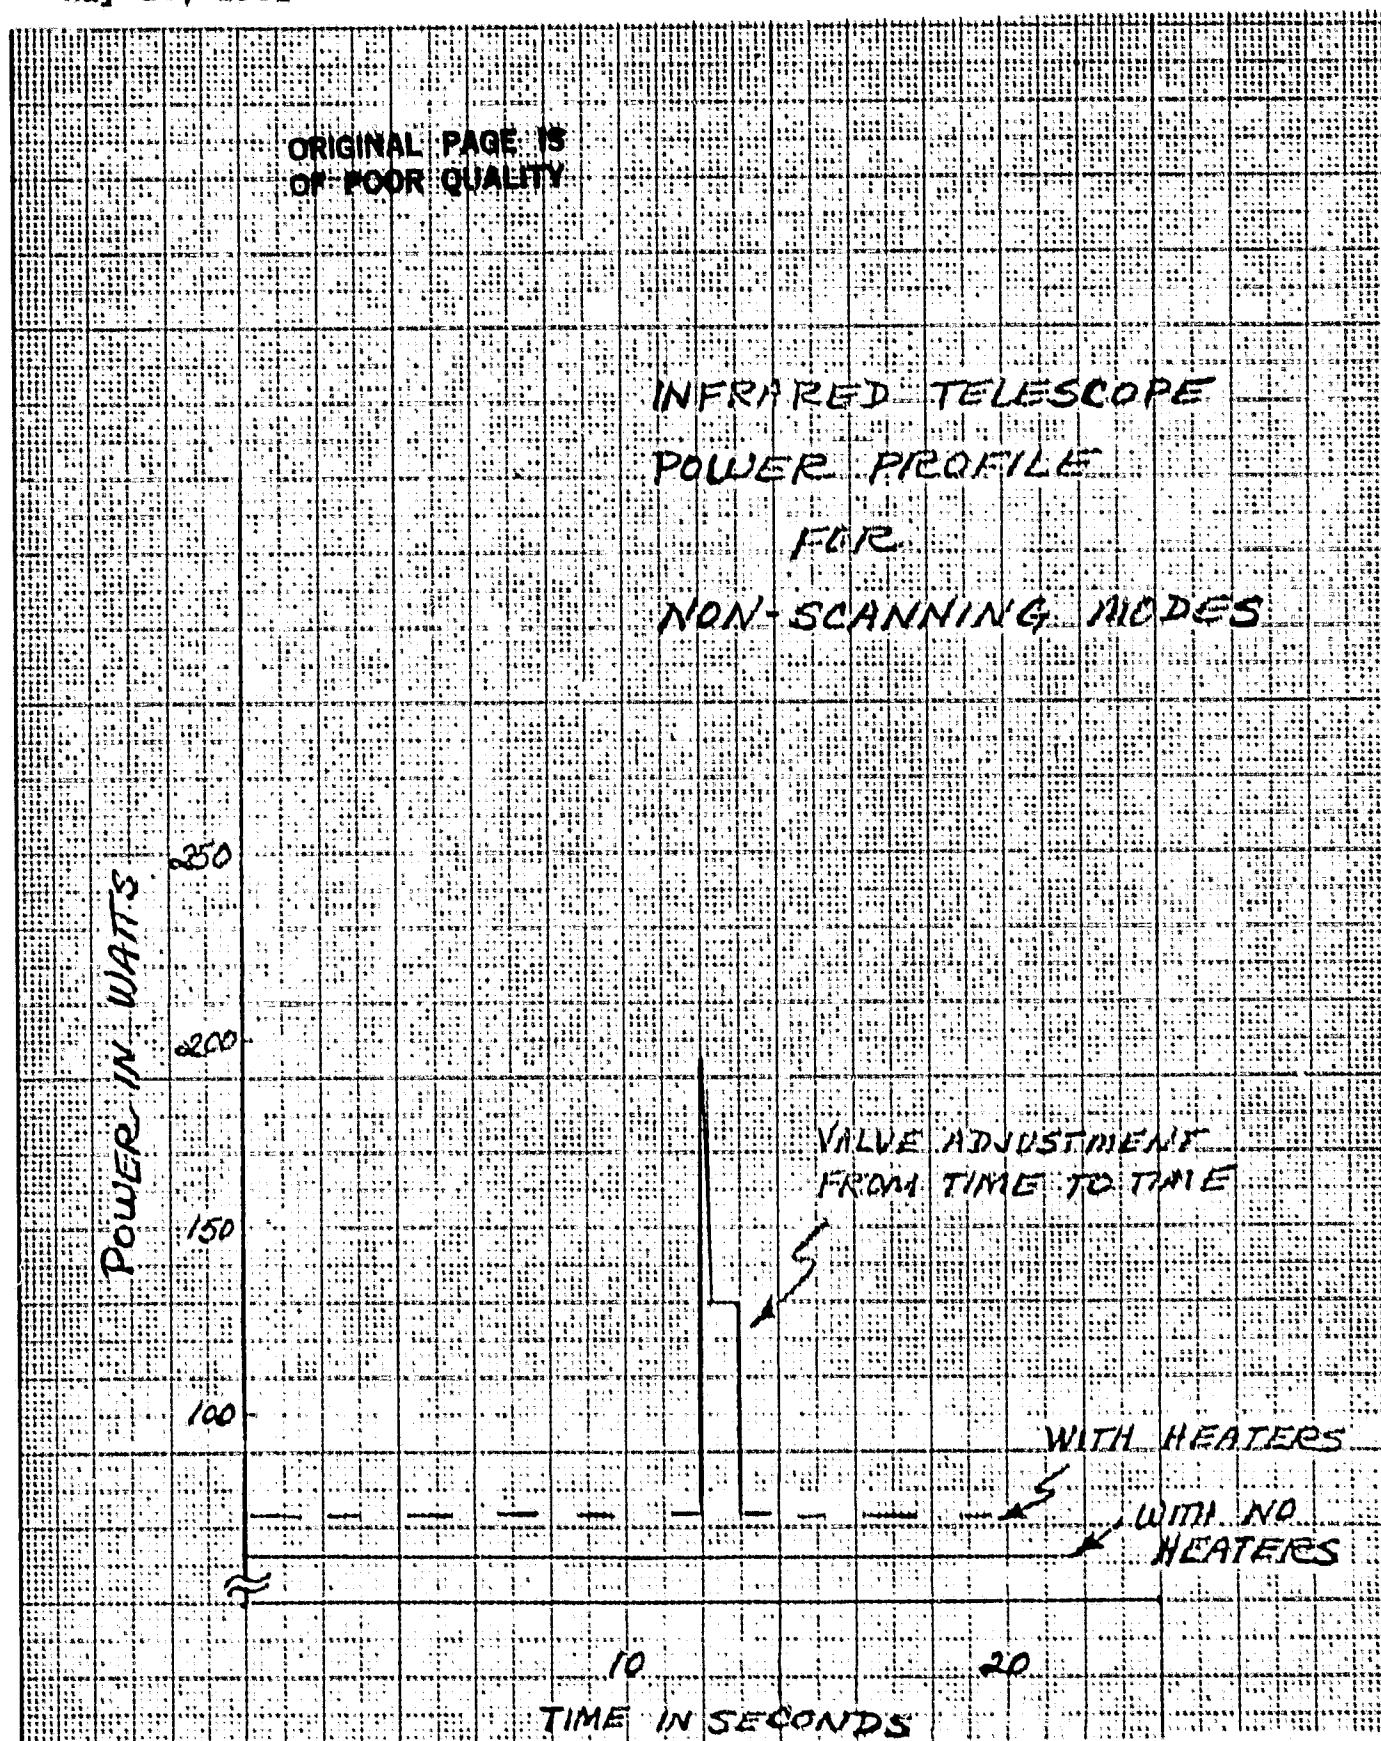


Figure 2.3.1-3. IRT Power Profile: Non-Scanning Modes

ORIGINAL PAGE IS
OF POOR QUALITY

2.3.2 Connector Requirements -

IRT connectors are detailed in Table 2.3.2-1. Pin designations are in Table 2.3.2-2 (TBD).

Table 2.3.2-1
Interface Connector Requirements

<u>IRT Subsystem</u>	<u>IRT-Mounted Connector</u>	<u>Mating Connector</u>	<u>Function</u>
EL-2 J1	M83723-22R2015N	M83723-23R2015N	Power
EL-2 J3	M83723-02R1006N	M83723-13K1006N	Ascent Power
VMA J2	M83723-22R2015N	M83723-23R2015N	Ground Power via T-0 Umbilical
EL-2 J11	MS27497E24F35P	MS27484E24F35S	RAU Signals
EL-2 J12	MS27497E24F35P	MS27484E24F35S	RAU Signals
EL-2 J13	MS27497E18F35P	MS27484E18F35S	RAU Signals
VMA J1	MS83723-02R1419N	MS83723-13R1419N	Ground Power and Signals via T-0 Umbilical

NOTE

Spacelab-2 protocol calls for the experimenter to provide the IRT-mounted connectors, NASA to provide the mating connectors as MPE. As a result SAO will not have mating connectors for the reflight unless special arrangements are made.

2.3.3 Additional Requirements -

No other special requirements have been identified.

2.4 THERMAL CONTROL REQUIREMENTS

2.4.1 Thermal Control Characteristics -

ORIGINAL PAGE IS
OF POOR QUALITY

TBD

2.4.2 Coatings And Coverings -

TBD

2.4.3 Cold Plate Requirements -

Electronics boxes EL-1 and EL-2 are cold-plate mounted. Dimensions and mounting data are in Section 2.1.1. Their combined heat dissipation into the freon system is estimated to be 100 watts operating and 50 watts in standby.

2.5 COMMAND AND DATA MANAGEMENT


It is important to note that the IRT's CDMS interface is the subject of a study being conducted by SAO. As a result, a DEP may be added to the flight system resulting in major changes to the CDMS interface. In this section we describe the current interface; future revisions may contain changes in keeping with the addition of a DEP.

2.5.1 CDMS Interface -

ORIGINAL PAGE IS
OF POOR QUALITY

Details of the CDMS interface are given in Table 2.5.1-1.
2.5.1-1.

Table 2.5.1-1
Experiment/CDMS Interface

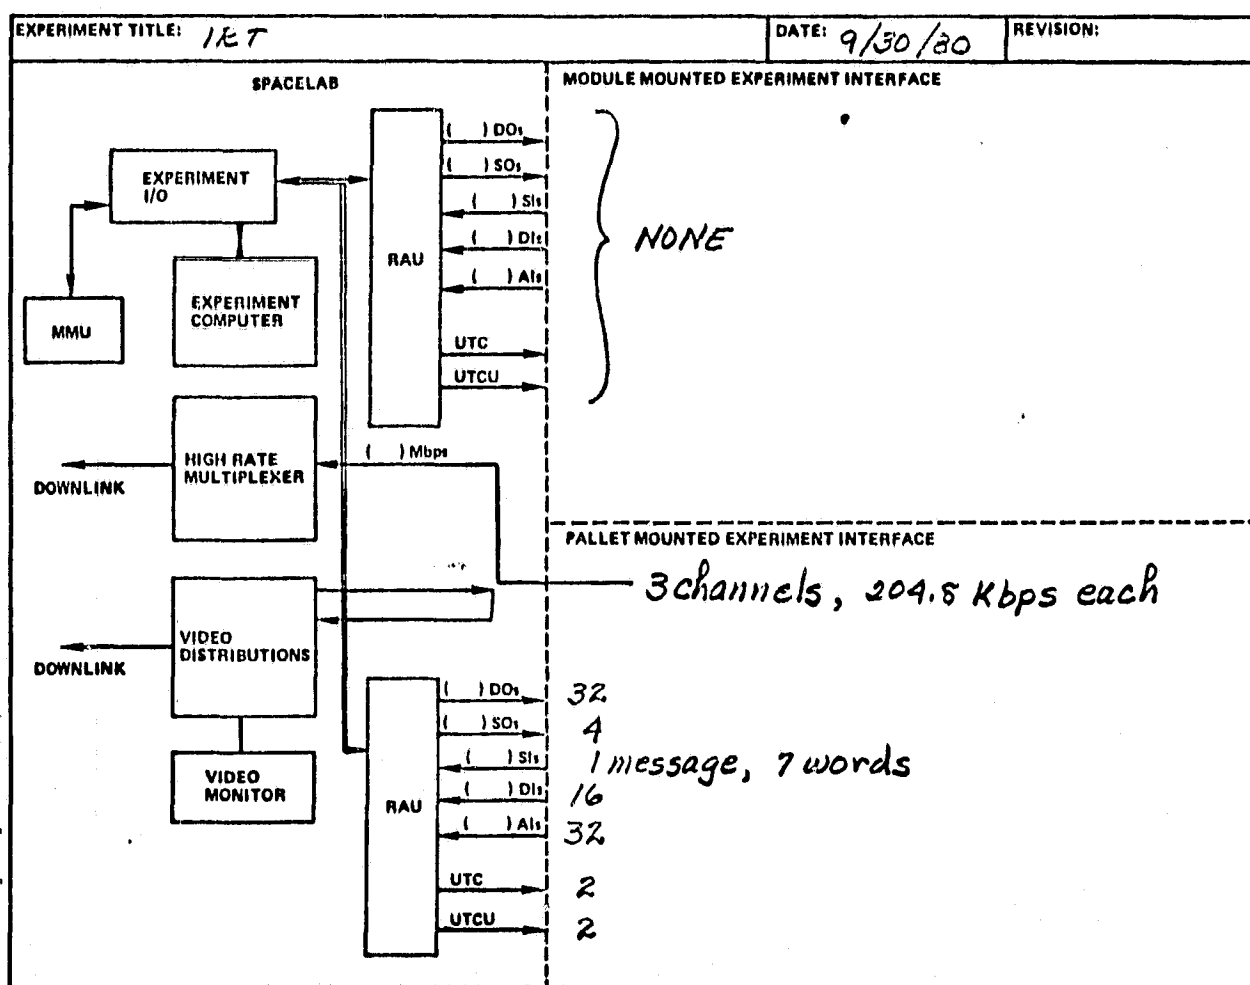

2.5.2 Experiment Inputs -

ORIGINAL PAGE IS
OF POOR QUALITY

All experiment inputs are described in detail in IRT-109, "Command and Housekeeping Definition" (see Appendix A). There are 32 discrete commands and 4 serial commands. The frequency at which various commands are issued depends entirely on mission profile, but will be of the order of one command every few minutes during FO1 and FO3, much less during other FO's.

2.5.3 Experiment Outputs -

IRT experiment outputs are described in two documents. Housekeeping is detailed in IRT-109, "Command and Housekeeping Definition." There are 16 discretes, 32 analogs, and one serial message. In addition, selected housekeeping data are transmitted via the HRM along with all infrared science data. The HRM output is described in IRT-116, "HRM Format Description" (see Appendix B). The three HRM frame formats are shown in detail in Figures 2.5.3-1, 2.5.3-2, and 2.5.3-3.

GMT FIRST 6 FRAMES

Note: For detailed information, see HRM Format Description, IRT-116

Figure 2.5.3-1. HRM Frame Format 1

ORIGINAL PAGE IS
OF POOR QUALITY

[illegible]

Note: For detailed information, see HRM Format Description, IRT-116

Figure 2.5.3-2. HRM Frame Format 2

ORIGINAL PAGE IS
OF POOR QUALITY

GMT FIRST 6 FRAMES

[illegible]

Note: For detailed information, see HRM Format Description, IRT-116

Figure 2.5.3-3. HRM Frame Format 3

ORIGINAL PAGE IS
OF POOR QUALITY

2.5.4 Other -

No other materials are carried on an IRT mission.

2.6 SERVICE REQUIREMENTS

2.6.1 Pre-Level IV Requirements -

It may be necessary to run a thorough functional test at KSC prior to Level IV. This will require approximately 500 liters of liquid helium and a vent line to the outside. The flow in the vent line is a few liters of room-temperature gaseous helium per hour (maximum). All necessary vacuum pumps, heaters, etc., are experiment provided.

Round-the-clock power and access are required when the experiment contains liquid helium.

2.6.2 Level-IV Requirements -

IRT functional testing, compatibility testing, and detailed mission simulations require that the IRT flight system be cryogenically cooled. A supply of liquid helium is required, the amount depending upon the number and durations of cooldowns. (It is desirable to minimize the number of cooldowns.) A vent line for room-temperature

gaseous helium flowing at a few liters per hour is required. Continuous power and round-the-clock access to the experiment are necessary whenever it contains liquid helium.

2.6.3 Level-I Requirements -

The final loading of liquid helium will be conducted in the Orbiter processing facility (OPF). Room-temperature gaseous helium will flow from an appropriate Orbiter vent. Continuous 115-VAC power must be applied via the T-0 umbilical. (Interruptions not longer than five hours can be tolerated.) Round-the-clock access to the experiment or its remote control box is necessary.

ORIGINAL PAGE IS
OF POOR QUALITY

3.0 EXPERIMENT OPERATIONAL PROCEDURES

This section provides the operational procedures that must be supported by NASA-provided software. It should be noted that these requirements may be substantially altered by the addition of a DEP, now under study at SAO.

3.1 TEST PROCEDURES

Prior to delivery to Level IV all testing and calibration will be controlled and monitored by IRT-provided GSE.

From Level IV through the mission all functional tests, compatibility tests, interface verification tests, and mission simulations are TBD.

3.2 MONITORING REQUIREMENTS

IRT status parameters are defined in IRT-109, "Command and Housekeeping Definition."

No hazardous conditions are indicated and no unusual displays are required. The following input signals are to be exception monitored by ECOS at 1 sps rate:

ORIGINAL PAGE IS
OF POOR QUALITY

- | | |
|--------------|--------------------------------|
| 1. DI2 | Command Interlock |
| 2. DI9 | Sun Alarm |
| 3. DI10 | Pressure Alarm |
| 4. DI11 | V10 Status Open |
| 5. AI1 | Dewar Liquid Temperature |
| 6. AI5 | Porous Plug Liquid Temperature |
| 7. AI24 | Cryo Vent Line Pressure |
| 8. AI25 | Dewar Vent Line Pressure |
| 9. SI1,W3,P1 | V9 Open |

ORIGINAL PAGE IS
OF POOR QUALITY

In addition, as described in Section 3.4 Displays, there is an ECAS monitor of V1 + V2. Diagnostic procedures are TBD.

3.3 OPERATIONAL PROCEDURES

3.3.1 Commands And Command Sequences -

The IRT has been designed to require very few commands and command sequences. In the normal mode nothing is time critical except to avoid operating more than one valve a time and to avoid pointing directly at the sun. For example, there are 30 discrete commands of which only one is normally used. The rest deal with initial configuration, landing configuration and various anomalous situations. Serial commands to control valves and the cold shutter will be used somewhat more often.

A sequence of valve commands will be generated by ECAS whenever it is necessary to adjust the flow of cold helium gas. From one to six valves will have to be operated, each requiring a separate command with an appropriate delay between commands to avoid operating more than one valve at a time. Each sequence will be initiated by command from the AFD or POCC, with the POCC being the preferred source.

3.3.2 Coordination Of Commands With Other Events -

All commands originating from the POCC will be coordinated by the mission timeline or in response to an anomalous situation. In most cases the timed command will be simply to start or stop scanning. Anomalous changes in internal temperature, for example, will call for a valve adjustment.

Some coordination will be required to accomplish FO3C and FO3E. In the first case observing simultaneously with another investigator will demand not only time coordination but also target location. In the second case the timing of selected Orbiter functions such as flash evaporator operation will be required so that the IRT can monitor any changes in the induced environment that may be associated with that Orbiter function.

ORIGINAL PAGE IS
OF POOR QUALITY

3.3.3 Limit Conditions -

ORIGINAL PAGE IS
OF POOR QUALITY

The major limit conditions requiring crew or POCC intervention are exception monitored, nine by ECOS and one by ECAS. They are listed in Section 3.2.

In addition, there may be unpredictable, although slow, variations in the internal temperature of the cryostat. These temperatures are displayed in the POCC and on the AFD (displays 5OP and 5TH). POCC intervention is the preferred mode.

3.4 DISPLAYS

Tables 3.4-1 and 3.4-2 illustrate the types of displays needed. The first set are typical for the POCC and KSC, the second set are for the AFD. Special processing to support the AFD displays includes:

1. Maintaining a command-received counter.
2. Perform valve control logic sequencing.
3. Perform limit sensing on the combined V1 + V2.
4. Receive and maintain the dewar liquid volume data.
5. Compute the flow rates.
6. Perform the cal cycle sequence.
7. Activate the porous plug heater for specified time.
8. Perform the Bright Object Avoidance Algorithm (BOAA).

Items 1, 3, 4 and 8 must be in permanent ECAS. Items 2, 6

and 7 can share the same allocated space. Item 5 need only be computed when the fifth display is allocated. All computations need not be updated more often than 1 Hz.

BOAA is defined in Section 3.5.5.2 of MSFC document JA-035, "Spacelab Mission Two Software Requirements Document."

Prelaunch and AFD displays are shown in Tables 3.4-1 and 3.4-2. They are fully defined and explained in JA-035 and in JA-032, "Ground Integration Requirements Document."

ORIGINAL PAGE IS
OF POOR QUALITY

```

1 1 GRT DDD/MM:MM:SS.SSS      DP....
2 5 TX 05 121 THERMAL/VALVE
3                                CMD REVD:
4
5 AI
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
10
```

```

1 CNT DDD/WH:MM:SS.SSS DP....
2 5 OP 05 INT OPERATIONS
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
103
```

DIL	0/1	CNT:	PCU	UT	17495	ECAS	16231
AI					AIR	STAT	P
17	CRYO VENT LIM	250	K	1 ICE	0/1		9
18	DEMR VENT LIM	265	K	2 JFET	0/1		10
19	SCAN MOTOR	280	K	3 PLUG	0/1		11
20	TERM CONT EX	281	K	4 SCAM	0/1		12
21	DEMR SHELL	260	K	5 PIN	0/1		13
22	SUNSHADE	201	K	6 EL3	0/1		14
23	QCM AMBIENT	290	K	7 TACH	0/1		15
24	CRYO VNT LM P	3.1+0	TR	8 COV	0/1		7
25	DEMR VNT LM P	8.2-1	TR	Q DGAS	0/1		8
26	AMBIENT PRES	6.3-6	TR				
27	SUN SENSOR	3.58	Y	VALVE STAT			
28	CRYO VI DEL P	4.2-2	TR	V1 CR7	0/1		
29	DEMR VT DEL P	4.9-3	TR	V2 DEM	0/1		
30	QCM SCIENCE	2.42	V	V9 EXP	OP/CL		
31	QCM INTERNAL T	311	K	V10 PR	OP/CL		
32	JFETS TEMP	34.2	K				
S	LAST VALVE CHD	V1/2-1/2/3	OP/CL				

CHND RECD:	DIL	O/I	CNT:	PCU	17495	ECAS	16231	
SI WORD 1			WORD 4			CROZEN STAT		TORR
SCAN LIMITS MD 00			2 SEUTTER		1	CZY0 VT		4.2-2
PRIME SCUP2			9 CAL SOJEC		0	DEWR VT		4.9-3
MAX 135.0			10 SHI CL D2		1			K
MIN x90.0			11 EMZ OP D2		0	DEWR LIC		x1.8
			12 CHOP 1 HZ		0	PLUG LIC		x1.8
			13 CEP 1/4 H		0	DETECTOR		x2.9
SI WORD 5			14 SHI CL CD		1	MIRROR		x7.9
2 ENCODEZ			15 CON UNLID		1			
0 PACTIV								

ORIGINAL PAGE IS
OF POOR QUALITY

Table 3.4-1. Prelaunch Ground Displays (sheet 1 of 2)

ORIGINAL PAGE IS
OF POOR QUALITY

[illegible]

1	CMT DDD/HH:MM:SS.SSS	DP....
2	5 EM 05 IRT EXCEPTION MONITORING	
3	CMD RECD:	
4	STATUS	
5	MONITORED	
6	V1+V2 CLOSED	0/7 0/7
7	V9 OPEN	OPEN CLOSED
8	V10 OPEN	OPEN CLOSED
9	CRYOGEN	
0	DEWAR LIQ	XX.X K
1	PLUG LIQ	XX.X K
2	CRYO VENT	X.X+X TORR
3	DEWAR VENT	X.X+X TORR
4	CMD RECEIVED	ON/OFF
5	CMD COUNTR	XXXXX
6	CMD INTERLOK	ON/OFF
7	5 V POWER	ON/OFF
8	APPLICATION SOFTWARE	
9		
0	OUT OF LIMITS	
1		

ORIGINAL PAGE IS
OF POOR QUALITY

```

12345678901234567890123456789012345678901234567
1 50P 5 IRT OPERATIONS GMT DDD/HH:MM:SS
2 DIS DIS DIS DIS DIS DIS DIS *
3 CMD RCVD XXXXX THERMAL MONITOR 5TH
4 1 BUS PWR XX SCAN SYSTEM 5SC
5 2 RESET DATA TEL TEMP (K)
6 3 CONTROL CRYO INLET XX
7 4 CLOCK SEL X FOCAL PLANE XX
8 5 CAL SOURCE XX 8K RING XX MRROR XX
9 6 CYCLE (XX) XX 8K TEL XX
0 7 SHUTTER XX 60K RING XX SHADE XXX
1 8 1.00Hz CHOP XX
2 9 0.25Hz CHOP XX 15 JFETS HTR XX
3 10 DOOR LATCH XX TEMP XX K
4 11 POS XX QCM
5 12 HTR XXX CONTAM XXX ug
6 13 SUN ALARM↑ XXX 16 DEGAS XX
7 14 PRES ALARM↑ XXX TEMP INT XXX K
8 AMB PRES XXX uT EXT XXX K
9 IRT MESSAGE LINE
0 XYZ >EC MESSAGE LINE NN HH:MM:SS EX(NN)
1 ABC *SC MESSAGE LINE NN HH:MM:SS SS(NN)
2 SCRATCH PAD LINE

```

MAY 27, 1980

Table 3.4-2. Aft Flight Deck Display (sheet 1 of 3)

ORIGINAL PAGE IS
OF POOR QUALITY

```

12345678901234567890123456789012345678901234567
1 5TH 5 IRT THERMAL MONITOR GMT DDD/HH:MM:SS
2 DIS DIS DIS DIS DIS DIS DIS *
3 1 BUS PWR XX CMD RCVD XXXXX 50P
4 2 SPACE VENT XX↑ 5SC
5 3 BKUP XX↑ TEMP (K)
6 4 VALVE CRYO [0-7] X DEWAR LIQ XX.X↑
7 5 DEWAR [0-7] X VCS INNER XX.X
8 GAS FLOW CRYO XX mg MIDDLE XXX
9 DEWAR XX mg OUTER XXX
0 LIQ VOL @HH:MM XXX L SKIN OUTER XXX
1 PRES CRYO XXX↑T PLUG LIQ XX.X↑
2 DEWAR XXX↑T VAPOR XX.X
3 DELTA ±.X
4 6 TC BOX HTR XXX CRYO INLET XX.X
5 TEMP XXX K 8K RING XX.X
6 7 PLUG HTR XX 60K RING XX.X
7 8 EXCEP MON ENA 120K RING XXX
8 9 INH
9 IRT MESSAGE LINE
0 XYZ >EC MESSAGE LINE NN HH:MM:SS EX(NN)
1 ABC *SC MESSAGE LINE NN HH:MM:SS SS(NN)
2 SCRATCH PAD LINE

```

MAY 27. 1980

Table 3.4-2. Aft Flight Deck Display (sheet 2 of 3)

ORIGINAL PAGE IS
OF POOR QUALITY

12345678901234567890123456789012345678901234567																
1	BSC S IRT SCAN SYS/BOH								GRT DST/AZ:NN:SS							
2									DIS DIS DIS DIS DIS DIS DIS *							
3	1 STOW/UNSTOW XX								CMDS RCDR XXXXX SOF							
4	2 PIN & SEAL HTR XXX								[5TH]							
E	3 SCAN MOTOR XX								SCAN CONTROL							
B	4 MOTOR HTR XXX								9 PRIM/BKUP XX							
F	TEMP XXX K								10 BOAA XXX XXX							
B	5 SCAN/HOLD XX								11 MANUAL XXX < XXX							
9									SHAFT ANGLE XXX°							
O	6 TACH HTR XXX								POS SWITCH XXX							
I	7 ELEC 3 HTR XXX								12 MIN SCAN RANGE YY							
Z	8 POS SWITCH OVRD XX								13 MAX SCAN ANGLE ZZ							
3																
L	XZ PLN YZ PLN								AVOID ANGLE (°)							
B	SUN ±XXX ±XXX								14 SUN XXX							
S	MOON ±XXX ±XXX								15 MOON XXX							
H	EARTH ±XXX ±XXX								16 EARTH XXX							
B	VEL ±XXX ±XXX								17 VEL VECTOR XXX							
S	GURT MESSAGE LINE															
O	XYZ %EC MESSAGE LINE NN HH:MM:SS EX(NN)															
A	AED %SC MESSAGE LINE NN HH:MM:SS SB(NN)															
E	SCRATCH PAD LINE															

MAY 27, 1980

Table 3.4-2. Aft Flight Deck Display (sheet 3 of 3)

4.0 FACILITIES AND SUPPORT REQUIREMENTS

ORIGINAL PAGE IS
OF POOR QUALITY

4.1 INSTALLATION AND ASSEMBLY REQUIREMENTS

The IRT will be delivered to KSC fully assembled except for certain interconnecting cables. It will be mounted on a "pallet" and will remain so mounted until it is transferred to the flight pallet at Level IV. A crane capable of lifting TBD pounds is the only NASA-provided GSE necessary.

4.2 SPECIAL PREPARATION

No special preparations prior to installation are required. The need for pre-installation testing is being studied. If it is deemed necessary, a clean area (equivalent to the cleanliness level of the O&C bay area) will be needed.

Space: TBD x TBD x TBD feet

Electrical Power:

28 VDC: TBD watts, connector type, TBD.

115 VAC: TBD watts, connector type, TBD.

220 VAC: 3, 3-phase, 30-amp, connector type: TBD

Liquid Helium: 500 liters.

Vent Lines for 3 vacuum pumps: Specifications TBD.

In addition, office space for 8 people will be needed.

4.3 ON-LINE ACTIVITIES

ORIGINAL PAGE IS
OF POOR QUALITY

4.3.1 Precautions -

No unusual precautions are required in handling the flight hardware.

4.3.2 Special Requirements -

No alignment requirements.

Continuous 115-VAC power (outages not more than five hours long separated by at least TBD hours) is required whenever the instrument is loaded with helium.

4.4 NASA-PROVIDED SUPPORT EQUIPMENT

No special NASA-provided GSE is required.

5.0 PREFLIGHT OPERATIONS REQUIREMENTS

Some time prior to closeout of the Orbiter bay, the IRT dewar must be filled with helium, and the helium cooled to the point where it is superfluid. Because a "soft" vacuum is required to maintain helium in the superfluid state, continuous 115-VAC power must thereafter be supplied to the vacuum pump mounted to the IRT support structure. If the pumping stops, the space above the fluid in the dewar slowly fills with helium gas, the pressure increases, and the liquid temperature rises. After a few hours the liquid helium has warmed to such an extent that it is no longer superfluid. In this state the helium cannot be managed in space; it will pour out of the dewar; and the experiment will be inoperable without its refrigeration.

To prevent this, the IRT has a built-in vacuum pump to maintain the needed vacuum above the fluid. It withdraws gaseous helium from the dewar and dumps it into a vent line that conducts the helium to an appropriate discharge point outside the Orbiter bay. Power outages of up to five* hours in duration can be tolerated, provided there are TBD hours of power-on between outages.

*It may be possible to relax this requirement by several hours if the IRT dewar proves to be particularly efficient.

The helium filling and conversion to superfluid require both electrical and mechanical GSE, some of which must be as close to the flight instrument as possible (to minimize the lengths of transfer pipes), but which is rather heavy (on the order of 1,000 pounds).

Filling and conversion operations are estimated to require up to five days. During that time a "hard" vacuum will be established in the dewar and cryostat guard-vacuum spaces. Thereafter no guard-vacuum pumping will be needed. From the end of helium-conversion operations until T-0, the experiment is monitored and controlled by GSE connected via the T-0 umbilical. At the end of the filling and conversion operations several adjustments must be made at the experiment. Transfer lines must be removed, valves closed, relief valves inserted, bias batteries connected to the detectors, and offset resistors adjusted. Experiment power is required for a few hours at that time.

5.1 ACCESS REQUIREMENTS

As described above, access to the experiment for five days as close to final closeout as possible is required. Heavy dewars and pumps must be located close by and hands-on access to the flight system is required.

5.2 SPECIAL SUPPORT REQUIREMENTS

A supply of liquid helium is required. The amount and delivery schedule depend upon detailed scheduling of integration and prelaunch activities.

6.0 FLIGHT REQUIREMENTS

6.1 OPERATING MODES

The IRT will be operated in several "modes."

Activate: Power is applied and the various subsystems are checked out by monitoring both housekeeping and IR data as a series of commands is transmitted. EC software is verified and the cover is unlatched.

Standby: This is the state of the instrument at the conclusion of the activation sequence. The electronics are energized, but the scan-drive motor is off to conserve energy. The system is returned to this state between active observing runs.

Prime Data: This is the celestial infrared observing mode. Orbiter attitudes are required in the -XVV orientations. Several contiguous orbital revolutions must be devoted to IRT operations in each of several roll attitudes. Exclusive observing time is not necessary provided gas and

particulate contamination is not generated by other simultaneous activities or thruster firing activity increased. IRT operation is nearly "automatic" although it must be closely monitored.

Controlled Contamination: IRT data will be taken during such activities as thruster firings to measure their effects on the Orbiter environment.

Coordinated Observing: IR data will be taken in coordination with other Spacelab experiments if the payload complement justifies it. Some special command sequences not used for other IR data taking may be required, to coalign the IRT and some other instrument, for example.

Helium Management: A series of control-valve commands will be issued to adjust the helium-bath temperature and to observe the effects of a variety of management techniques.

Deactivate: This series of activities will normally take place only once, at

the conclusion of the mission. The cover will be closed and latched, the cryostat secured for landing, helium-vent valves adjusted, and power turned off.

In all modes but the second and the last two, aperiodic calibrations may be needed. They are accomplished by closing the cold shutter momentarily. This requires two serial commands spaced by a few seconds. Table 6.1-1 gives some of the major parameters for these modes. Although there are no pointing requirements, certain Orbiter attitudes are necessary (see Section 2.2).

Table 6.1-1
Instrument Operating Mode Requirements

<u>Parameter</u>	<u>Standby Mode</u>	<u>All Other Modes</u>
Power		
28 V instrument	64 watts	367 watts (peak) 172 watts (average)
28 V heaters	10 watts (avg.)	78 watts (max.)
400 Hz	-0-	-0-
Digital Data Downlink	614.4 Kbits/sec	614.4 Kbits/sec
Analog Data Downlink Bandpass	NA	NA
Video Downlink	No	No
Typical Duration	Few Hours	Few Hours
Number of Cycles Required	1 More cycles are tolerable, depending upon mission plan	1 each

6.1.1 Typical Timeline Description -

At liftoff the power via the T-0 umbilical to the vacuum pump is removed and the vent line sealed. Once the vacuum of space is reached a barometrically controlled spacevent opens to resume "pumping" on the helium. (A small rise in pressure and temperature is tolerable in the dewar during ascent.) The baroswitch and valve are energized by ascent power.

As soon as the Spacelab is powered up a crew member must verify that the spacevent is open, and if it is not, power up the IRT and command open either the primary or backup valve. This is done by selecting the appropriate item entries on AFD Display 5TH.

To prepare for observing, the normal verification of subsystems precedes the opening of the telescope's vacuum cover. Once the cover is open, sources of contaminating dust and gas, such as water dumps, flash evaporator operations, thruster firings, and effluents from other experiments must be carefully controlled and minimized to keep the Spacelab environment as clean as possible for infrared astronomical observing. A considerable number of valve commands may be necessary both before and after the cover is opened to establish and maintain the correct thermal conditions within the instrument.

Helium flow control valves may also be adjusted from time to time to maintain the desired temperatures during observing sequences. The EC, using the bright-object-avoidance algorithm (BOAA), calculates the position of sun, moon, earth and velocity vector and when necessary reduces the 90-degree arc over which the telescope scans to prevent these bright objects from shining into the optical system. The Orbiter is in the "airplane" mode, with nose slightly up because orbiting with the velocity vector into the telescope aperture may cause rapid buildup of contaminants. At least three contiguous revs of observing are required with the Z direction close to the local vertical, with the Orbiter rolled 30 degrees right, and 30 degrees left. This sequence of 9 revs is performed at least three times with several days between each sequence.

Later in the mission observations will be continued during flash evaporator exercises, water dumps, and other contaminating events to measure their impact. Also, special observing sequences, coordinated with other Spacelab experiments, may be undertaken.

Finally a series of valve operations will be executed to explore the limits of superfluid helium management in space.

Before reentry the vacuum cover will be closed and the stow pin engaged. However, these are for experimenter convenience and failure of either operation will not jeopardize either the Orbiter or the IRT system. No power is required during reentry except during a launch abort in which case the spacevent is resealed to prevent ingestion of air into the cryogenic system.

Tables 6.1-2 and 6.1-3 show the IRT pointing requirements.

6.2 TARGETS AND VIEWING CONSTRAINTS

Figure 6.2-1 shows field-of-view requirements.

Inasmuch as the IRT is a scanning survey instrument no specific targets are identified. The longest possible observing time is desired, spread over the mission as described in Sections 1.3, 1.4, and 3.

6.3 ANCILLARY PARAMETER REQUIREMENTS

The following parameters are required onboard: UTC, UTCU, State Vector (both AM50 and GTOD). Ancillary parameters are required postmission for thruster activity, flash evaporator operations, and water dumps. See Table 6.3-1.

Table 6.1-2
Pointing Performance Requirements

TBD

Table 6.1-3
Pointing Service Requirements

TBD

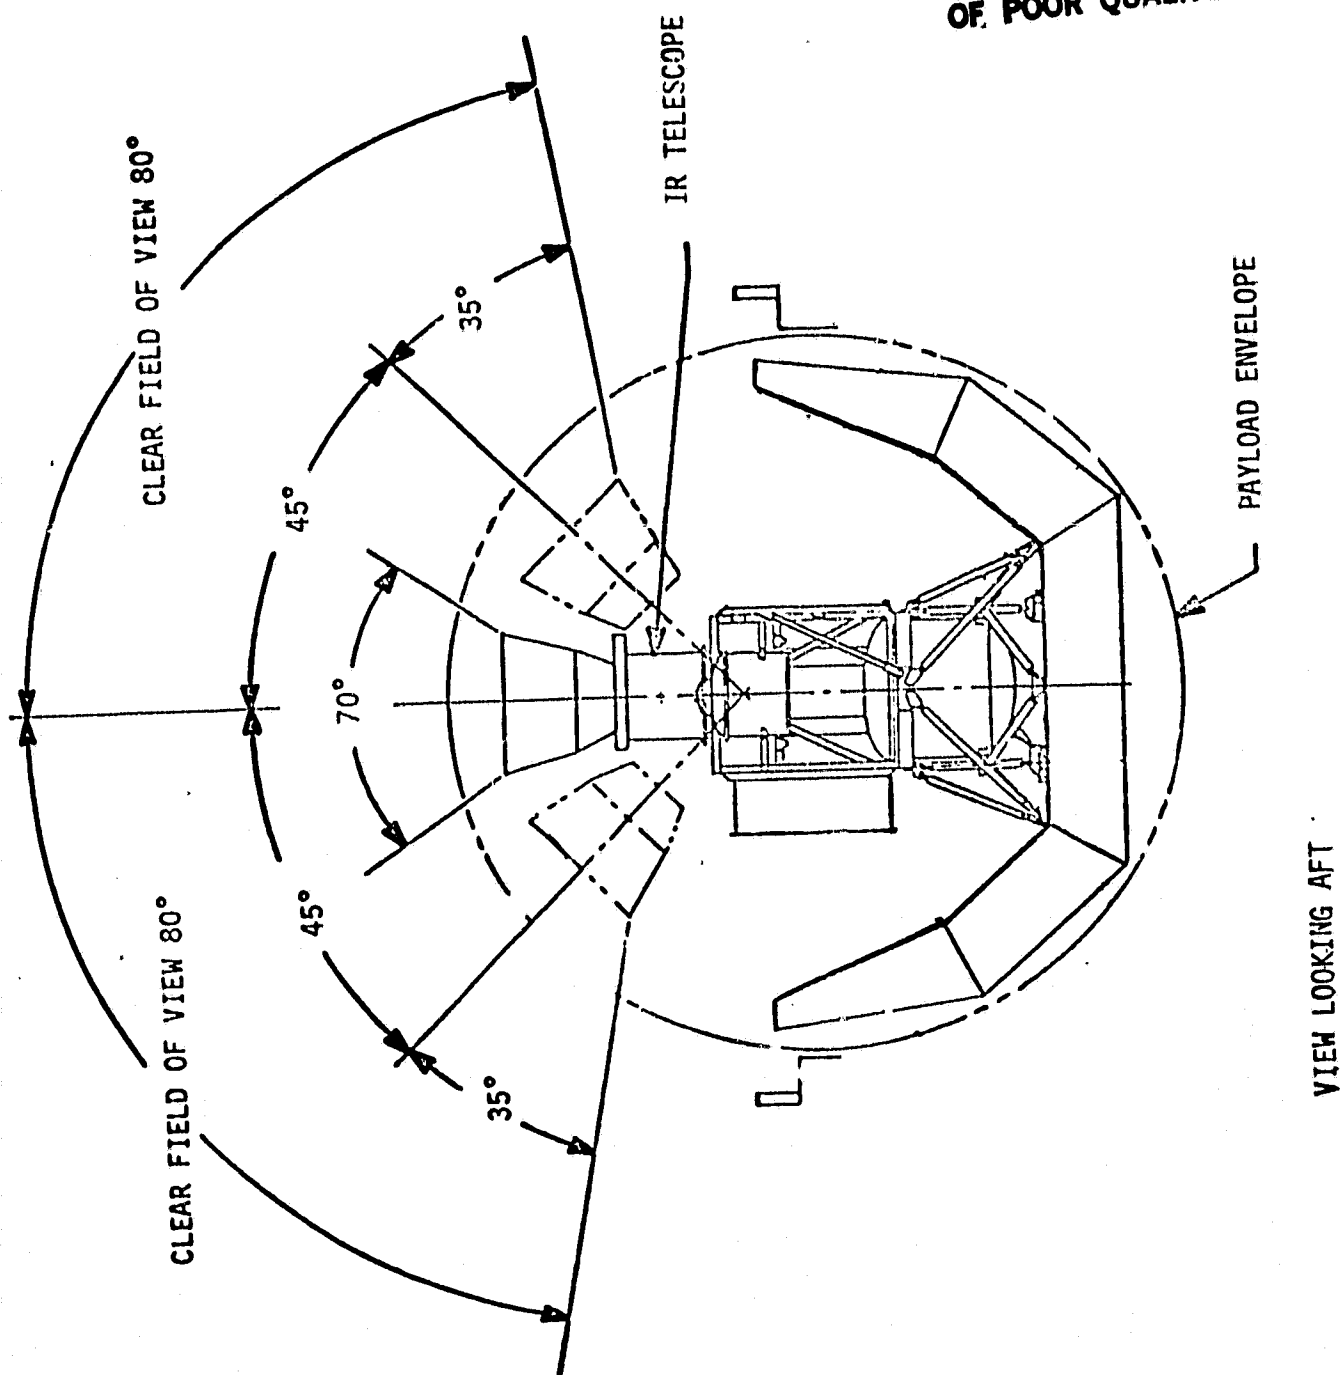


Figure 6.2-1. Telescope Motion Envelope and Clear Field of View

Table 6.3-1
Ancillary Parameter Requirements

<u>Parameter</u>	<u>Onboard</u>	<u>Postmission</u>
Absolute time, UTC (millisec)	Yes	Yes
Orbiter Position (meters)	Yes	Yes
Orbiter Velocity (m/sec)	Yes	Yes
Orbiter Attitude (deg)	Yes	Yes
Other (describe)	Times of flash evaporator activity and water dumps	

GN&C Data Requirements

State Vector	Yes	Either AM50 or GTOD
Current Attitude	Yes	Either AM50 or GTOD
Orbiter Body Rates	Yes	

6.4 FLIGHT ENVIRONMENTAL SENSITIVITY LIMITS

TBD

Table 6.4-1
Flight Environment Limits

TBD

NOTES

1. IRT cannot operate in South Atlantic Anomaly
2. IRT cannot operate when ambient pressure is above 10^{-5} torr.
3. IRT is highly sensitive to H_2O and CO_2 . Emission of these molecules must be held² to an absolute minimum during the astronomy portion of IRT activity.

6.5 VEHICLE MOTION LIMITS

When the IRT is not taking data (either off or in standby) there are no motion limits short of destructive accelerations.

When the IRT is taking data variations in the rotation rates must be less than 0.006 degrees/sec per axis. Pitch rate is to be 0.067 degrees/sec, roll and yaw rates are to be 0.0 degrees/sec.

6.6 PAYLOAD SPECIALIST REQUIREMENTS

The Payload Specialist serves as a backup to POCC-generated instrument control except for one crucial action. As soon after reaching orbit as possible a crew member must verify the opening of the spacevent as described in Section 6.1.1.

6.7 SPECIAL SUPPORT REQUIREMENTS

No special support is required.

7.0 POSTFLIGHT EQUIPMENT REQUIREMENTS

7.1 ACCESS

No special access is required. Dust covers and vent-line caps should be reinstalled as soon as possible after the payload bay doors are opened. No postmission tests or calibrations are required.

7.2 DEINTEGRATION REQUIREMENTS

TBD

APPENDIX A

IRT-109D, "Command and Housekeeping Definition"

ORIGINAL PAGE IS
OF POOR QUALITY

Rev. A 12/05/78
Rev. B 09/25/79
Rev. C 04/30/80
Rev. D 09/20/80

D. Koch
D. Koch

Small, Helium-Cooled Infrared Telescope

COMMAND AND HOUSEKEEPING DEFINITION

K. Fredholm

November 21, 1978

University of Arizona
Steward Observatory

Marshall Space Flight Center
Space Sciences Laboratory

Smithsonian Institution
Astrophysical Observatory
60 Garden Street
Cambridge, Massachusetts 02138

COMMAND AND HOUSEKEEPING DEFINITION

IRT-109

ORIGINAL PAGE IS
OF POOR QUALITY

I N D E X

	<u>Pages</u>
CHANGE LOGS	ii-iv
GENERAL COMMENTS	1
DISCRETE COMMANDS (DO1-DO32)	2-4
DISCRETE INPUTS (DI1-DI16)	5
ANALOG INPUTS (AI1-AI32)	6-7
SERIAL COMMANDS (SO1-SO4)	8-9
SERIAL INPUTS (SI1-SI7)	10
RESET FUNCTION (DO29,DO32)	11-13
HRM DIGITAL HOUSEKEEPING	14
LIMIT SWITCH TRUTH TABLE	15

Rev. D

IRT-109
Change Log

ORIGINAL PAGE IS
OF POOR QUALITY

Revision D -- September 20, 1980

<u>Pages</u>	<u>Change</u>
i	Page 9 became 10, 10-12 became 11-13, 13 combined with 6-7, 15 became 14, 16 not shown became 15.
1	DO24 and 25 pulsed mode deleted. DO 7, 8 and 32 added as pulsed. Added AI14 can be negative. Specified JA-030E. Changed SN to SC. Added comments on Motor CMDS and Command Received Indicator.
2,3,4	Added † and [] footnotes. Identified and/or added corroborative housekeeping. Added item entries to ECAS display. Changed SN to SC. Added EM to DO's 9, 27 and 28.
5	Identified DO's affecting DI1. Changed various ECAS displays. Added EM to DI9 and 10. Added †† footnote.
6,7	Combined previous pages 6 and 7 with pages 13 and 14. AI14 changed to plug delta temp. Updated displays, location, type, calibration, and range.
8	For SO2 defined two different formats. For SO3 defined format having two words.
9	Formerly part of page 8. Defined format having two words. Identified the second word as having two messages. Defined ECAS display and item entries. Named the valves. Expanded the footnote.
10	Formerly page 9 in Rev. C. Added notes 5, 6, and 7. Deleted IIA reference. Added information to words 3, 5, 6 and 7.
11	Formerly page 10. Defined acronyms MFS and DCR.
12	Formerly page 11. Added "by one step" to A.4. Spelled out F/F in D.1 and E.2.

IRT-109

Change Log,
continued

ORIGINAL PAGE IS
OF POOR QUALITY

Revision D -- September 20, 1980

<u>Pages</u>	<u>Change</u>
13	Formerly page 12. Added to EL-2, 1. and 3.; EL-1, 3.; and note.
14	Formerly page 15. Under function identified the source, i.e., DO or DI. Changed +, - and zero to MAX, MIN and Center, respectively.
15	Formerly page 16. Interchanged order of columns. Added DI reference. Changed +, - and zero to MAX, MIN and Center, respectively.

IRT-109
Change Log

ORIGINAL PAGE IS
OF POOR QUALITY

Revision C -- April 29, 1980

<u>Page</u>	<u>Change</u>
1	Definitions added.
2	IIA references deleted. DO and DI designations added. DO1 and DO2 not used in SL-2. DO3,7,8 added housekeeping. DO7,8 changed to pulsed.
3	IIA references deleted. DO, DI, AI and SI designations added. DO17 Thermal Control Enclosure. DO18 On (Focal Plane Array). DO19 On. DO20, AI19 (T19). DO21 Stow Pin (set to -25°C). DO22 EL-3 Box (set to 0°C). DO26 On.
4	DO32 Control Reset
5	DI1 (Reset by end of SHK readout) DI12 +5V Sense
8	SO1,2 reference added. **footnote added. I.D. bits identified.
9	Notes 3 and 4 added. WD5 changed to unlatched. UTCU changed to UCSU.
10	Reset functions revised throughout.
13	Analog input definition added.
16	Limit switch truth table added.

COMMAND AND HOUSEKEEPING DEFINITION

ORIGINAL PAGE IS
OF POOR QUALITY

General Comments

Definitions -- Inputs and outputs are named as "viewed" by the Experiment Computer. Hence commands are outputs, housekeeping signals are inputs.

Discrete Commands (DO) -- All discrete commands are to be considered to be latched level commands unless otherwise specified. Commands 1, 2, 7, 8, 29 and 32 will be pulsed commands. Command 9 is used with commands 7 and 8. A pulse command is typically of 100 ms duration.

Rev.
D

Discrete Inputs (DI) -- All levels are 5 V CMOS compatible. A '1' defines the active state.

Analog Inputs (AI) -- All signals are 0-5.06 V full scale -- 7-bit resolution step size = 40 mV except AI14, which can be negative.

Rev.
D

References: SPAH Appendix A -- Section 4.0, Command and Data Management Subsystem
SL-2 IIA for Experiment 5 (JA-030E) -- Section 4.0, Electrical

Rev.
D

Section 6.0, Command and Data
Management

ECAS Display -- ECAS pages OP for Operations, TH for Thermal Monitor, and SC for SCAN SYS/BOAA. EM indicates ECOS or permanent ECAS exception monitor.

Motor CMDS -- More than one motor should not be running at a time, not counting the scan drive, due to large current required (TBD AMPS). This includes DO3-6, 10, 11 and SO4. The running time for all but the cover motor is 0.8-1.2 sec for 22 V-32 V, respectively.

Rev.
D

Command Received Indicator (DI1) -- Responds to pulsed DO's (29 and 32), either edge of level DO's (10, 11, 13-28, 30 and 32) and SO4.

ORIGINAL PAGE IS
OF POOR QUALITY

Discrete Commands*

<u>IRT CMD No.</u>	<u>Function</u>	<u>Housekeeping</u>	<u>ECAS Display- Item Entry</u>	<u>IRT Ref. Dwg. No.</u>	<u>Rev. D</u>
DO1***	Power On (P)* (Not used on SL-2)	DI12 (+5V Sense) Data Output		1260	
DO2***	Power Off (P)* (Not used on SL-2)	DI12 (+5V Sense) No Data Output		1260	
DO3 [†]	Cover Unlatch	DI6, [DI5] SI WD5 P15	OP-10	1200 -- sheet 4	
DO4 [†]	Cover Latch	DI5, [DI6] SI WD5 P15	OP-10	1200 -- sheet 4	
DO5 [†]	Cover Open	DI3, [DI4] HRM DHK Bits 2+10 [Science Data]	OP-11	1200 -- sheet 4	
DO6 [†]	Cover Close	DI4, [DI3]	OP-11	1200 -- sheet 4	
DO7	Backup Unlatch**(P)	SI WD5 P15		1200 -- sheet 4	
DO8	Backup Open**(P)	DI3, [DI4] HRM DHK Bits 2+10 [Science Data]		1200 -- sheet 4	
DO9	Command Interlock**	DI2	EM	1245	
DO10 [†]	Stow	DI1 (Cmd Rcvd) DI7, [DI8]	SC-1	1280	
DO11 [†]	Unstow	DI1 (Cmd Rcvd) DI8, [DI7]	SC-1	1280	
DO12	HRM Clock Select	Non-Detector HRM Data	OP-4	1250	
DO13	Scan	DI1 (Cmd Rcvd) [DI14,15,16 (Switches)] HRM DHK Bits 0+8	SC-3	1280	
DO14	Scan Zero Rate	DI1 (Cmd Rcvd) HRM DHK Bits 1+9	SC-5	1280	
DO15	Backup Shutter Open	DI1 (Cmd Rcvd) SI WD5 P11 HRM DHK Bits 4+12 [Science Data]		1245	
DO16	Cal Source On	DI1 (Cmd Rcvd) SI WD5 P9 HRM DHK Bits 3+11 [Science Data]	OP-5,6	1245	

*Level commands unless noted with (P) -- pulse command.

**Commands 7 and 8 are interlocked by Command 9.

***Power On/Off no longer commandable 4/11/80.

[†]Only one motor should be running at a time (not including scan drive).

[] Indicates corroborative information.

Rev.
D

ORIGINAL PAGE IS
OF POOR QUALITY

Discrete Commands*

<u>* IRT CMD No.</u>	<u>Function</u>	<u>Housekeeping</u>	<u>ECAS Display- Item Entry</u>	<u>IRT Ref. Dwg. No.</u>
D017	Heater 1 (Thermal Control Box) (10 W)***	DI1 (Cmd Rcvd) SI WD7 P9 [AI20 (T20) (set to 0°C)]	TH-6	1270
D018	Heater 2 JFETS	DI1 (Cmd Rcvd) SI WD7 P10	OP-15	1270
D019	Heater 3 (Porous Plug) (1/8 W)	DI1 (Cmd Rcvd) SI WD7 P11 [AI5 (T5), AI6 (T6)]	TH-7	1270
D020	Heater 4 (Scan Motor)*** (20 W)	DI1 (Cmd Rcvd) SI WD7 P12 [AI19 (T19) (set to 0°C)]	SC-4	1270
D021	Heater 5 (Ferrofluidic Seal)*** (10 W) (Stow Pin)*** (5 W)	DI1 (Cmd Rcvd) SI WD7 P13 (set to -20°C) (set to -25°C)	SC-2	1270
D022	Heater 6 (EL3 Box)*** (10 W)	DI1 (Cmd Rcvd) SI WD7 P14 (set to 0°C)	SC-7	1270
D023	Heater 7 (Tachometer) (10 W)*** (Encoder) (10 W)***	DI1 (Cmd Rcvd) SI WD7 P15 [AI19 (T19) (set to 0°C)]	SC-6	1270
D024	Sun Sensor (Override/Reset)	DI1 (Cmd Rcvd) [AI27 (Sun Sensor)] DI9	OP-13	1280
D025	Ion Gauge -- P4 (Override/Reset)	DI1 (Cmd Rcvd) [AI26 (P4) Ion Gauge] DI10	OP-14	1280
D026	QCM De-Gas Heater On	DI1 (Cmd Rcvd) SI WD7 P8 [AI30 (QCM)] [AI31 (T24)]	OP-16	1270
D027 [†]	V9 Open (Backup Space Vent)	DI1 (Cmd Rcvd) SI WD3 P1	TH-3, EM	1245
D028 [†]	V9 Close (Backup Space Vent)	DI1 (Cmd Rcvd) SI WD3 P0	TH-3, EM	1245
D029	Data Reset (P)	DI1 (Cmd Rcvd)	OP-2	1250
D030	Heater 8*** (Latch Motor) (5 W)*** (Cover Motor) (5 W)***	DI1 (Cmd Rcvd) SI WD7 P7 (Set to -25°C)	OP-12	1280

Rev.
D

*Level commands unless noted with (P) -- pulse command.

***Thermostat controller.

†Only one motor should be running at a time (not including scan drive).

[] Indicates corroborative information.

Rev.
D

Discrete Commands*

ORIGINAL PAGE IS
OF POOR QUALITY

<u>IRT CMD No.</u>	<u>Function</u>	<u>Housekeeping</u>	<u>ECAS Display- Item Entry</u>	<u>IRT Ref. Dwg. No.</u>
DO31	Backup Limit Switch Override	DI14,15,16 (Switches)	SC-8	1200 -- sheet 4
DO32	Control Reset (P)	DI1 (Cmd Rcvd) [DI13, SI WD2,3,5]	OP-3	1245

Rev.
D

*Level commands unless noted with (P) -- pulse command.
[] Indicates corroborative information.

Rev.
D

Discrete InputsORIGINAL PAGE IS
OF POOR QUALITY

<u>Input No.</u>	<u>Function</u>	<u>Type</u>	<u>ECAS Display</u>	<u>IRT Ref. Dwg. No.</u>	
DI1	Command Received (for DO's 10,11, 13-30,32 and S04)	Acknowledge (Reset at 1 Hz by end of SI Readout)	OP,TH, SC***	1260	Rev. D
DI2	Command Interlock	DO9, Cmd Echo	EM	1200 -- sheet 4	
DI3	Cover Opened**	Position Sense	OP	1280	
DI4	Cover Closed	Position Sense	OP	1200 -- sheet 4	
DI5	Cover Latched	Position Sense	OP	1200 -- sheet 4	
DI6	Cover Unlatched	Position Sense	OP	1200 -- sheet 4	
DI7	Stowed	Position Sense	SC	1280	
DI8	Unstowed	Position Sense	SC	1280	
DI9	Sun Alarm*	Latched Indicator (Reset or Over- ride with DO24)	OP,EM	1280	Rev. D
DI10	Pressure Alarm*	Latched Indicator (Reset or Over- ride with DO25)	OP,EM	1280	
DI11	V10 Status -- Open (Ascent Pwr)	Position Sense	TH,EM	1200 -- sheet 5	
DI12	Power On	+5V Sense ^{††}		1260	Rev. D
DI13	Shutter Closed**	Driver Enabled	OP	1245/80	
DI14 [†]	Max Limit Switch**	Position Sense	SC	1280	
DI15 [†]	Min Limit Switch**	Position Sense	SC	1280	Rev. D
DI16 [†]	Center Position Switch**	Position Sense	SC	1280	

*Closes cover and shutter, and commands the telescope to zero rate when the threshold is exceeded. Shutter closure may be prevented by DO15 -- Backup Shutter Open.

**Also available in HRM Digital Housekeeping Word.

***Exception monitored during integration but not mission.

†Refer to Limit Switch Truth Table, pg. 15, for explanation.

††Could be used as AI to measure 5 V output.

Rev.
D

Analog Inputs

Signal	Device	Location	Type	Calibration	Range (0-5 V)	Comment	ECAS Display	IRT Ref. Dwg. No.
AI1	T1	Dewar Liquid	Ge	Exp	1-5K		TH,EM	1200 -- sheet 8
AI2	T2	Dewar 20K VCS	Diode	Polynomial	15-50K		TH	"
AI3	T3	Dewar 60K VCS	Pt	Exp	40-100K		TH	"
AI4	T4	Dewar 120K VCS	Pt	Exp	80-160K		TH	"
AI5	T5	Porous Plug Liquid	Ge	Exp	1.5-5K	H3	TH,EM	"
AI6	T6	Porous Plug Vapor	Ge	Exp	1.5-5K	H3	TH	"
AI7	T7	Cold Finger Inlet	Ge	Exp	1-5K		OP,TH	"
AI8	T8	Cryo 8K Ring	Ge	Exp	5-20K		OP,TH	"
AI9	T9	Detector Block	Ge	Exp	2.5-8K	H2	OP	1340
AI10	T10	Mirror	Carbon		4.2-20K		OP	1340
AI11	T11	Focal Plane Box	Carbon		4.2-20K		OP	1340
AI12	T12	Cryo 60K Ring	Pt	Exp	40-100K		OP,TH	1200 -- sheet 8
AI13	T13	Cryo 120K Ring	Pt	Exp	80-160K		TH	"
AI14	T14	Plug delta T	Ge	Linear	+2K	H3	TH	"
AI15	T15	Cryo 60K VCS	Pt	Exp	40-100K			"
AI16	T16	Cryo 120K VCS	Pt	Exp	80-160K			"
AI17	T17	Cryo Vent	Pt	Linear	225-325K			"
AI18	T18	Dewar Vent	Pt	Linear	225-325K			"

ORIGINAL PAGE IS
OF POOR QUALITY

Rev.
D

Analog Inputs

Signal	Device	Location	Type	Calibration	Range (0-5 V)	Comment	ECAS Display	IRT Ref. Dwg. No.
AI19	T19	Scan Drive	Pt	Linear	100-350K	H4	SC	1200 -- sheet 8
AI20	T20	Thermal Cont. Box	Pt	Linear	100-350K	H1	TH	"
AI21	T21	Dewar Shell	Pt	Linear	100-350K		TH	"
AI22	T22	Sunshade	Pt	Linear	100-350K		OP	1340
AI23	T23	QCM Ambient	Pt	Linear	100-350K		OP	1340
AI24	P1	Cryo Vent Line	Thermistor	Log	0.1-100 Torr		TH,EM	1200 -- sheet 8
AI25	P2	Dewar Vent Line	Thermistor	Log	0.1-100 Torr		TH,EM	"
AI26	P4	Thermal Cont. Box	Cold Cathode	Log	10^{-7} - 10^{-3} Torr		OP	
AI27	Sun Sensor	Sunshade	PIN Si	Linear	0-5 V	Science Data		1350
AI28	AP1	Cryo Vent Orifice	Capacitance	Linear	0-1 Torr	Need AI17,24	TH	1200 -- sheet 8
AI29	AP2	Dewar Vent Orifice	Capacitance	Linear	0-1 Torr	Need AI18,25	TH	"
AI30	QCM	Cryostat Shell	Crystal Oscillator	Linear	0-5 V	Science Data	OP	1350
AI31	T24	QCM Internal	Pt	Exp	100-350K	QCM De-Gas Heater	OP	1340
AI32	T25	JFETS	Carbon	Linear	7.2-300K		OP	1340

ORIGINAL PAGE IS
OF POOR QUALITY

Serial Commands

- S01. GMT
Format -- 5 16-bit words
- S02. State Vector
Format -- AM50 31 16-bit words
GTOD 29 16-bit words
- S03. Scan Limits (ECAS display SC Item Entries 9, 10, 11)
Format -- 2 16-bit words
WD0 STSW header

Ref.: IPRD
SPAH, Appendix A

Bits

MSB		LSB	
0	1 - 7	8	9 - 15
MODE	Θ_X, MAX	MODE	Θ_X, MIN

WD1

$0 < \Theta_X < 180^\circ$ $\text{LSB} = 1.40625^\circ$ $\Theta_X = 90^\circ$ at +z axis, $\Theta_X = 0^\circ$ at +y axis

BIT		MODE	Θ_X RANGE
0	8		
0	0	PRIME	45° - 135° VARIABLE
0	1	BACKUP	45° - 90° FIXED **
1	0	BACKUP	90° - 135° FIXED **
1	1	BACKUP	45° - 135° FIXED **

**Bits 1-7 and 9-15 ignored in backup mode.

ORIGINAL PAGE IS
OF POOR QUALITY

Rev. D

Rev. D

Serial Commands

S04. Commutated Command

Format -- 2 16-bit words

WD0 STSW header, WD1 as follows:

Bits

MSG0	Type	ECAS Display Item Entry	MSB															LSB		
			0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15		
MSG0	Shutter	OP-9, 8, 7, (6)	0	0	X	X	X	X	X	X	X	X	X	X	CHOP 1/2 Hz	CHOP 1 Hz	CLOSE	X		
MSG1	Valve*	TH-2, 5, 4	1	0	V10 CLOSE	V10 OPEN	V2-3 CLOSE	V2-3 OPEN	V2-2 CLOSE	V2-2 OPEN	V2-1 CLOSE	V2-1 OPEN	V1-3 CLOSE	V1-3 OPEN	V1-2 CLOSE	V1-2 OPEN	V1-1 CLOSE	V1-1 OPEN		
			I.D. Bits			Primary Vent Line			Dewar Valve			Cryostat Valve								

*Only one (1) valve is to be actuated at a time. On time for motors is 0.8-1.2 sec. Sending another valve command before previous valve has completed actuation will result in first valve being stopped in an intermediate state, and execution of the second valve actuation.

ORIGINAL PAGE 18
OF POOR QUALITY

Serial Inputs

(Data Request Synchronous with UCSU)

Bits (Note 4)

	MSB															LSB		
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15		
WD1 Timing Word	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	Note 2	
WD2 Scan Limit Cmd Echo	BU/ PRI			DATA					BU/ PRI				DATA				Note 5	
WD3 Valve Controls Cmd Echo	V9 CLOSE D028	V9 OPEN D027	V10 CLOSE	V10 OPEN	V2-3 CLOSE	V2-3 OPEN	V2-2 CLOSE	V2-2 OPEN	V2-1 CLOSE	V2-1 OPEN	V1-3 CLOSE	V1-3 OPEN	V1-2 CLOSE	V1-2 OPEN	V1-1 CLOSE	V1-1 OPEN	Note 1	
WD4 Valve Positions	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	Note 3	
WD5 Shutter Cmd Echo	X	X	X	X	X	X	X	X	X	CAL D016	CLOSE DRIVE	EMER OPEN D015	CHOP 1 Hz	CHOP 1/2 Hz	CLOSE CND	UN-LATCHED	Note 6	
WD6 Scan Encoder Position	PARITY	ENC FLD	MTR FLD	MSB	DATA			RANGE 0°								LSB		
WD7 Heater Cmd Echo	X	X	X	X	X	X	X	I18 COVR D030	I11 QCM DEGAS D026	I11 TCB D017	I12 JFET D018	H3 PLUG D019	I14 SCAN D020	I15 PN/SL D021	I16 EL3 D022	H7 TACH D023		

X = don't care

Note 1: V1-1,2,3: Cryostat Proportional Valve

V2-1,2,3: Dewar Proportional Valve

V9 or V10 Open Position and V1+V2 combination exception monitored, V9 and V10 by ECOS, V1+V2 by permanent ECAS.

Note 2: S11 (Timing Word) -- used to synchronize RAU Formatter Timing -- Ref. IRT-1233.

Note 3: Bit 15 indicates cover latch position (proximity switch).

Note 4: A parity bit is added to each of the above words before transmission to the RAU (17 bits total).

Note 5: See S03 for bit definition.

Note 6: Parity (for Bits 15 only) includes encoder failed and motor failed.

Note 7: Note the word numbering in the IIA is from 0 to 6.

ORIGINAL PAGE IS
OF POOR QUALITY

Reset Functions (D029, D032)

Data Reset (D029)* is used to initialize or resynchronize all HRM Timing and RAU Serial PCM Data functions. It is or'ed with (IRT-1250) internal resets and distributed as follows:

1. Resets divide by 5 counter (IRT-1250) for 204.8 KHz clock.
2. Develops all of the following outputs:
 - A. MFS, Major Frame Synch
 - B. 1 Hz
 - C. RAU Sync
 - D. DCR, Discrete Command Received
 - E. RAU Reset
 - F. HRM Reset #1, 2, 3
 - G. Major frame reset #1, 2, 3

Rev.
D

Rev.
D

The following page describes the function of item #2 (A-G) in greater detail and references IRT drawing numbers where logic level information may be found.

*or'ed with D029 are the following:

- (1) loss of UCS (40 μ s pulse)
- (2) loss of UCSU (40 μ s pulse)
- (3) power on Initialize

ORIGINAL PAGE IS
OF POOR QUALITY

A. <u>MF'S</u>	<u>IRT Ref. Dwg. No.</u>	
1. Resets format enable counter	1220	
2.* Resets GMT readout	1242	
3.* Swaps state vector registers if new data has been received	1243	
4.* Clocks shutter/cal source counter by one step	1245	Rev. D
B. <u>1 Hz</u>		
1. Resets minor frame counter	1220	
C. <u>RAU Sync</u>		
1.* Sets PCM request on trailing edge	1230	
D. <u>DCR</u>		
1.* Clocks command received flip flop	1260	Rev. D
E. <u>RAU Reset</u>		
1.* Resets GMT readout	1242	
2.* Resets PCM request flip flop	1230	Rev. D
F. <u>HRM Reset -- #1, 2, 3</u>		
1. Resets 4 conversion delay counter	1220	
2. Resets format counter	1220	
3. Resets FIFO output stage	1330	
G. <u>Major Frame Sync #1, 2, 3</u>		
1. Resets conversion timing		

*From HRM receiver on Ch 1 only

Control Reset (D032) is used to clear serial command registers and the shutter/cal source counter in EL-2, and to provide a buffered reset output from EL-2 to EL-1 for scan function resetting. A power on initialization circuit is also or'ed with D032 to provide identical operations automatically. These operations are as follows:

EL-2

IRT Ref. Dwg. No.

1.* Clears shutter cmd register, i.e. 1/4 and 1 Hz chop and close cmds set to zero

1245

Rev.
D

2.* Presets shutter/cal source counter to zero

1245

3.* Resets all valve cmd registers, i.e. V1, V2 and V10 set to zero

1245

Rev.
D

4.** Reset output to EL-1

1200 -- sheet 2

EL-1

EL-1 Reset**

Reset is or'ed with an internal power on

MSFC 42A20106

initialize (~120 ms) to accomplish the following:

1. Immediately inhibits scan cmd disabling motor drive.
2. Resets scan cmd delay counter (2-second delay).
3. Initializes scan command register to full scan backup mode. SI WD2 will indicate backup full scan.
4. Resets counters used for scan turnaround indicator pulses.

Rev.
D

Note: Scanning will resume in the full scan backup mode unless new S03 received 2 seconds after reset is removed if D013 = 1 and D014 = 0.


Rev.
D

*From HRM receiver on Ch 1 only

**From HRM receiver on Ch 2

ORIGINAL PAGE IS
OF POOR QUALITY

HRM DIGITAL HOUSEKEEPING

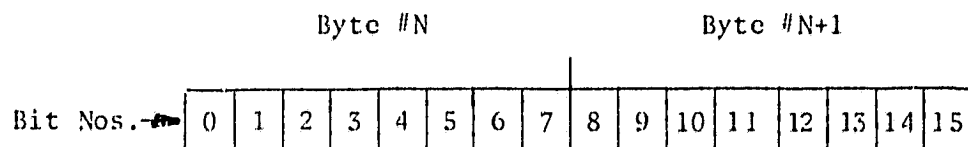

Used in HRM formats #2 and #3 only	Byte #N	Byte #N+1	(Note 1)
	7	8	
	31	32	
	55	56	
	79	80	
	105	106	
	129	130	
	153	154	
	177	178	

Bit #	Function	State Definition	
0 + 8	Scan, DO13	"1" = Scan On	"0" = Scan Off
1 + 9	Scan Zero Rate, DO14	"1" = On	"0" = Off
2 + 10	Cover Opened, DI3	"1" = Opened	"0" = Closed
3 + 11	Cal Source On, DO16	"1" = On	"0" = Off
4 + 12	Shutter Closed, DI13	"1" = Closed	"0" = Opened
(Note 2) { 5 + 13	MAX Limit Switch, DI14	"1" = Closed	"0" = Opened
6 + 14	MIN Limit Switch, DI15	"1" = Closed	"0" = Opened
7 + 15	Center Position Switch, DI16	"1" = Closed	"0" = Opened

Rev. D

Notes

1. Byte #N+1 is a repeat of data in byte #N. This data is updated 8X per minor frame in the locations identified in the table above.
2. Closed limit switch indicates that the switch cam is in contact at that position. Limit Switch Truth Table on next page.
3. IRT Ref. Dwg. No. 1280 (Scan Control)

ORIGINAL PAGE IS
OF POOR QUALITY

LIMIT SWITCH TRUTH TABLE

MIN LIMIT DI15 BIT 6/14	CENTER POS DI16 BIT 7/15	MAX LIMIT DI14 BIT 5/13	TELESCOPE POSITION (DEGREES)
0	1	1	45
0	0	1	45 - 90
1	0	1	90 (center)
1	0	0	90 - 135
1	1	0	135

Rev. D

APPENDIX B

IRT-116, "HRM Format Description"

ORIGINAL PAGE IS
OF POOR QUALITY

Small Helium-Cooled Infrared Telescope

. HRM FORMAT DESCRIPTION

K. Fredholm
Smithsonian Astrophysical
Observatory

2 October, 1979


University of Arizona
Steward Observatory

Marshall Space Flight Center
Space Sciences Laboratory

Smithsonian Institution
Astrophysical Observatory
60 Garden Street
Cambridge, Massachusetts 02138

ORIGINAL PAGE IS
OF POOR QUALITY




SYNC CODE AND FRAME NO.

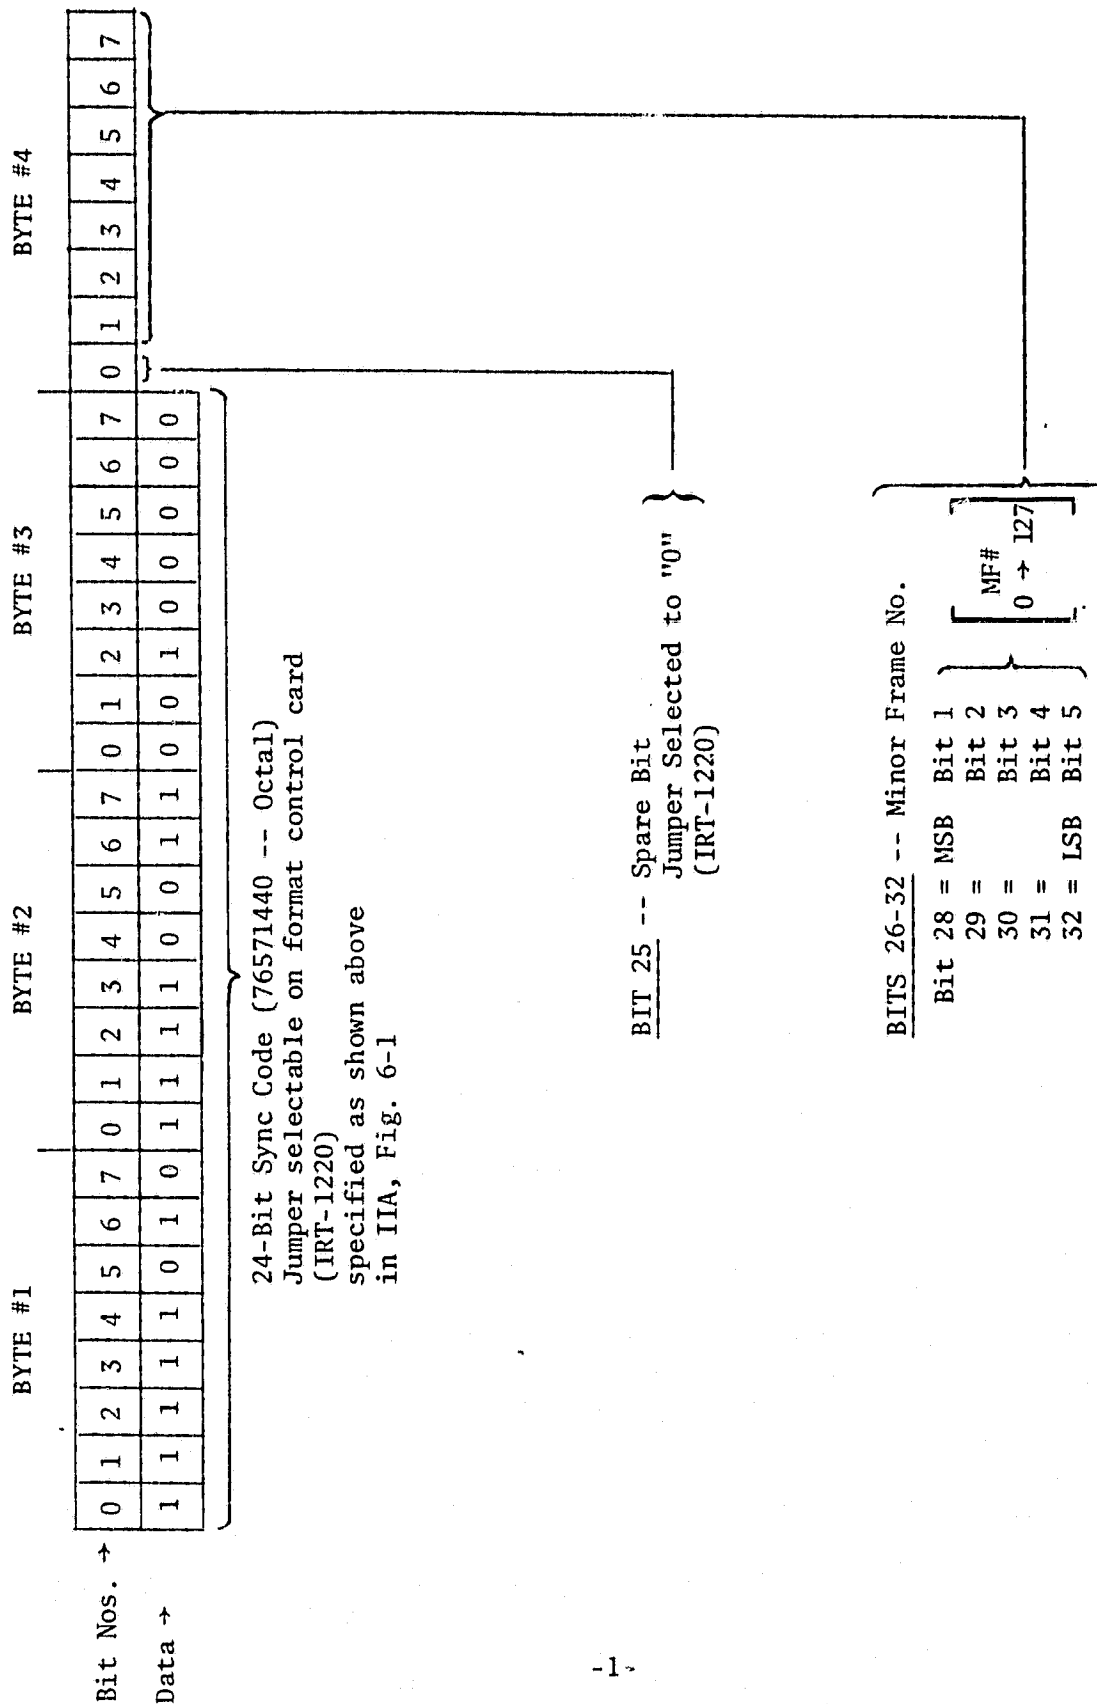

ORIGINAL PAGE IS
OF POOR QUALITY

GMT


Ref: IRT-1242 -- GMT CMD BUFFER, Rev.
SPAH, APPENDIX A -- Issue 1, July 31, 1978
MSFC-STD-630, April, 1979
SPACELAB HIGH RATE MULTIPLEXER FORMAT STANDARDS

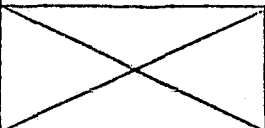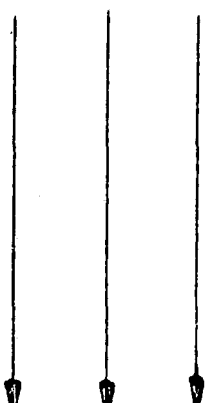			LOCATION WITHIN FRAME	
			BYTE #5	BYTE #6
Minor Frame	0		EXPERIMENT ID.	MODE (CH ID.)
"	"	1	MISSION ID.	GMT #1
"	"	2		GMT #2
"	"	3	GMT #4	GMT #5
"	"	4	GMT #6	DATA 1
"	"	5	DATA 2	DATA 3
				
Minor Frame	31		<div> <div>(NOTE)</div> <div><u>ALL ZEROES</u></div> </div>	

Note: IRT Ref. Dwg. No. 1242 (GMT Cmd Buffer)

GMT -- MINOR FRAME 0


EXPERIMENT ID. (Byte #5 of Minor Frame #0)

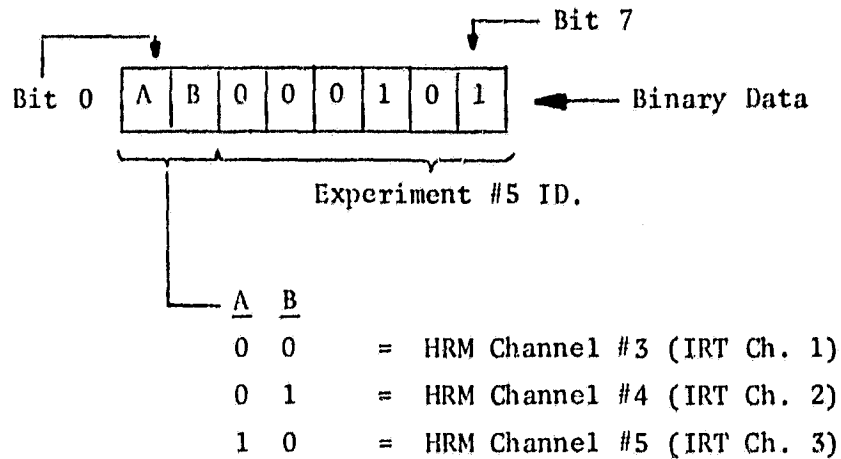

MODE

(Byte #6 of Minor Frame #0)


with Channel ID.

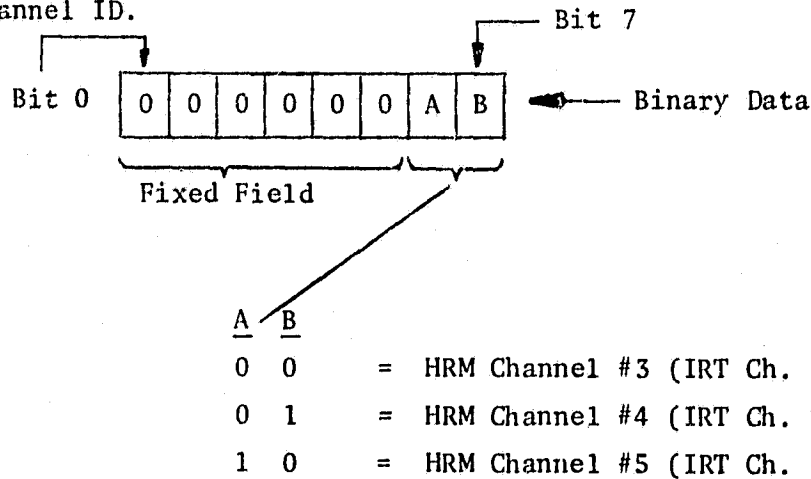

ORIGINAL PAGE IS
OF POOR QUALITY


GMT -- MINOR FRAME 1

MISSION ID. (Byte #5 of Minor Frame #1)

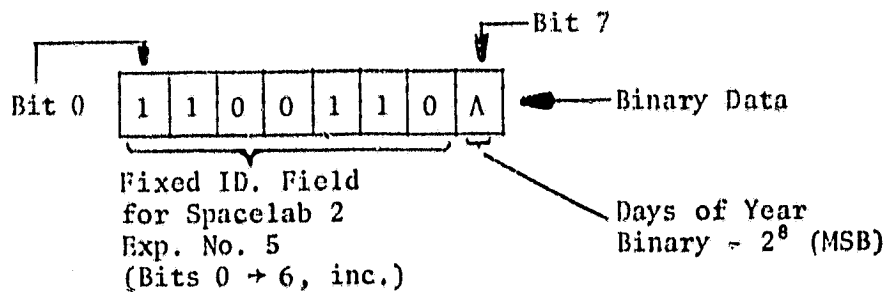

GMT #1

(Byte #6 of Minor Frame #1)

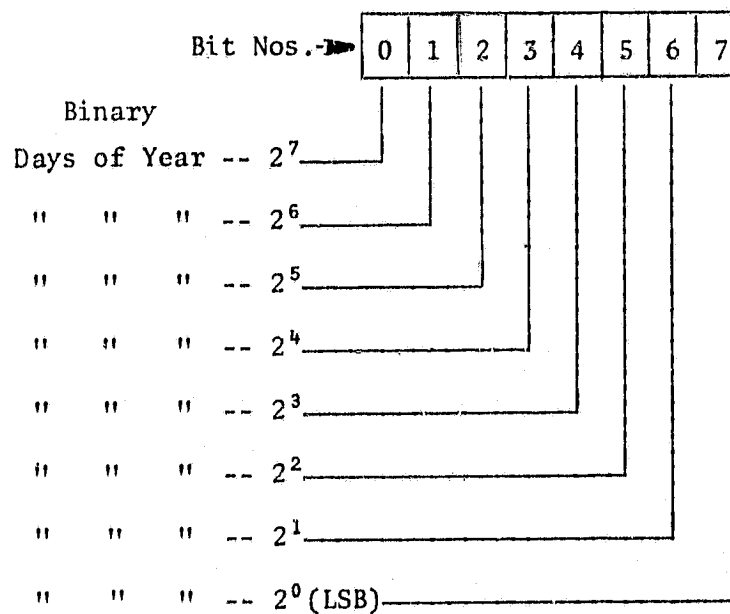


Note: MSB of GMT #1 is included with the mission ID. byte

GMT -- MINOR FRAME 2

GMT #2

(Byte #5 of Minor Frame #2)


Milliseconds of Day
(High Order)

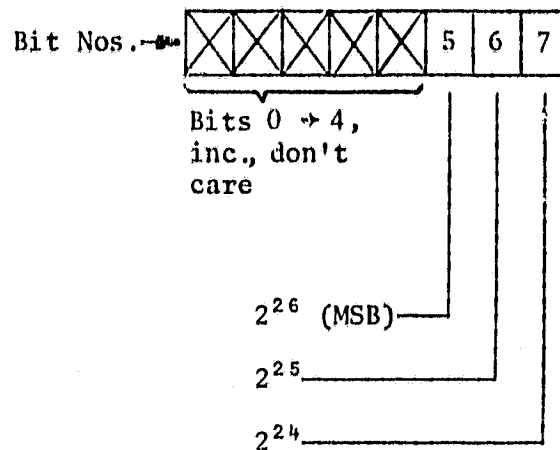

GMT #3

(Byte #6 of Minor Frame #2)

Milliseconds of Day
(High Order)
Binary

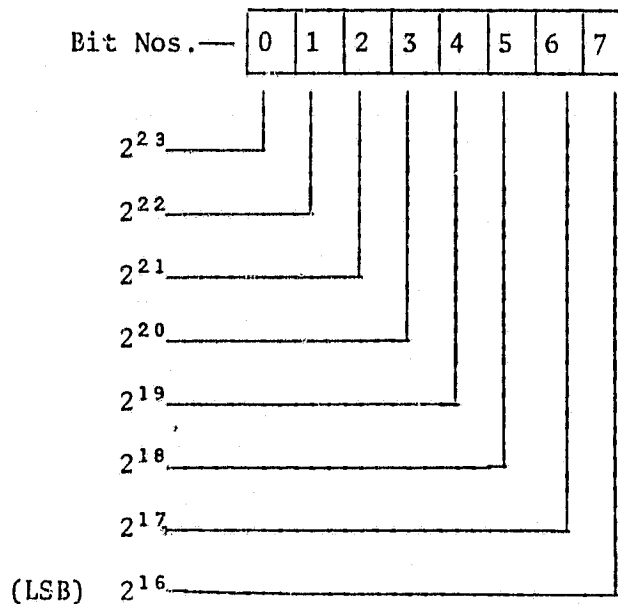


GMT -- MINOR FRAME 3

GMT #4

**ORIGINAL PAGE IS
OF POOR QUALITY**

(Byte #5 of Minor Frame #3)


Milliseconds of Day
(Low Order)
Binary

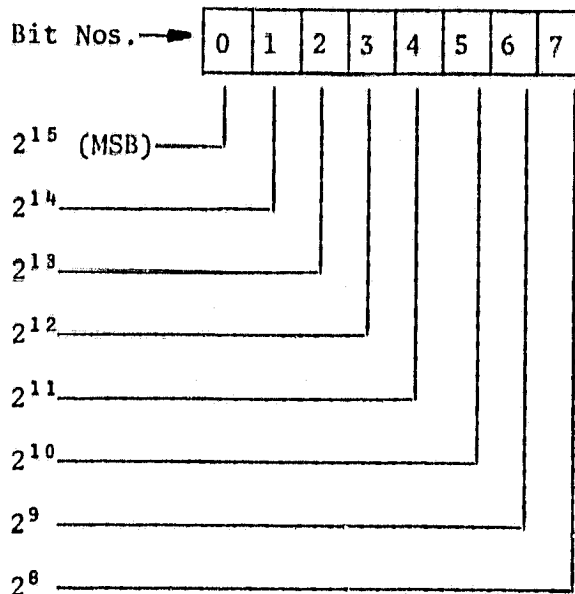

GMT #5

(Byte #6 of Minor Frame #3)

Milliseconds of Day
(Low Order)
Binary

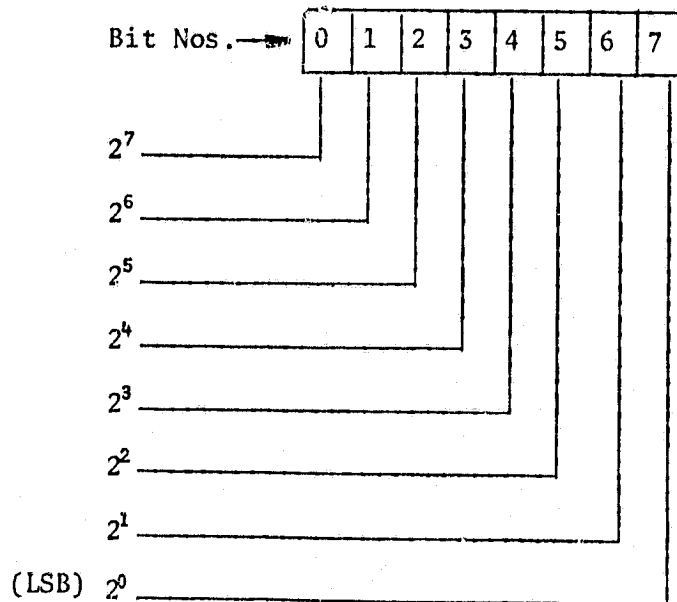


ORIGINAL PAGE IS
OF POOR QUALITY

GMT -- MINOR FRAME 4

GMT #6

(Byte #5 of Minor Frame #4)

Fractional Milliseconds
Binary

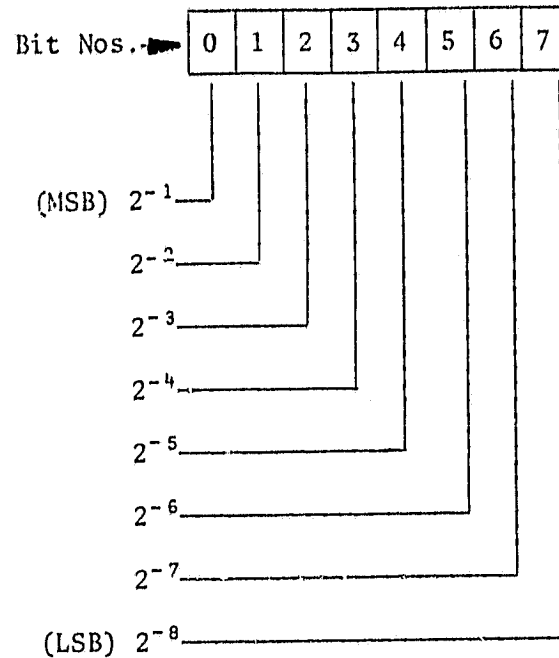


DATA 1, 2, 3, etc.

Contain all zeroes

C-2

DIGITAL HOUSEKEEPING

ORIGINAL PAGE IS
OF POOR QUALITY

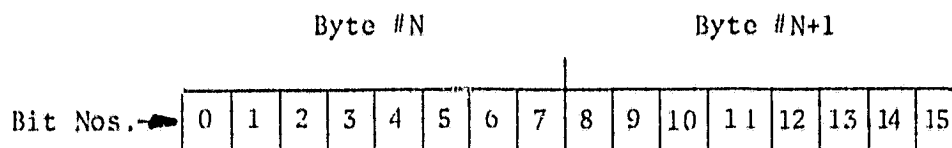

	Byte #N	Byte #N+1	(Note 1)
Used in HRM formats #2 and #3 only	7	8	
	31	32	
	55	56	
	79	80	
	105	106	
	129	130	
	153	154	
	177	178	

Bit #	Function	State Definition	
0 + 8	Cmd 13 (Scan)	"1" = Scan On	"0" = Scan Off
1 + 9	Cmd 14 (Scan Zero Rate)	"1" = On	"0" = Off
2 + 10	Cover Opened	"1" = Opened	"0" = Closed
3 + 11	Cal Source On	"1" = On	"0" = Off
4 + 12	Shutter Closed	"1" = Closed	"0" = Opened
(Note 2) { 5 + 13	(+) Limit Switch	"1" = Closed	"0" = Opened
6 + 14	(-) Limit Switch	"1" = Closed	"0" = Opened
7 + 15	Zero Position Switch	"1" = Closed	"0" = Opened

Notes

1. Byte #N+1 is a repeat of data in byte #N. This data is updated 8X per minor frame in the locations identified in the table above.
2. Closed limit switch indicates that the switch cam is in contact at that position.
3. IRT Ref. Dwg. No. 1280 (Scan Control)

LIMITS

Byte #N

Byte #N+1

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
---	---	---	---	---	---	---	---	---	---	----	----	----	----	----	----

Used in
HRM formats
#2 and #3
only

Byte #N


Byte #N+1

9	10
33	34
57	58
81	82
107	108
131	132
155	156
179	180

<u>Bit #</u>	<u>Function</u>	<u>State Definition</u>
1	Mode (MSB)	See Table 1
2	Θ_X , MAX DATA A (MSB)	"1" = 90.00°
3	" " DATA B	"1" = 45.00°
4	" " DATA C	"1" = 22.50°
5	" " DATA D	"1" = 11.25°
6	" " DATA E	"1" = 5.625°
7	" " DATA F	"1" = 2.813°
8	" " DATA G (LSB)	"1" = 1.406°
9	Mode (LSB)	See Table 1
10	Θ_X , MIN DATA A (MSB)	"1" = 90.00°
11	" " DATA B	"1" = 45.00°
12	" " DATA C	"1" = 22.50°
13	" " DATA D	"1" = 11.25°
14	" " DATA E	"1" = 5.625°
15	" " DATA F	"1" = 2.813°
16	" " DATA G (LSB)	"1" = 1.406°

LIMITS, Cont.

Note: Range of Θ_X , MIN/MAX $0^\circ \rightarrow 178.594^\circ$ in steps of 1.406° (LSB)

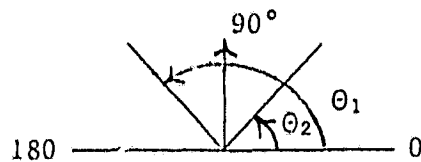

$$\Theta_1 = \Theta_X \text{ MAX}$$

$$\Theta_2 = \Theta_X \text{ MIN}$$

$$90^\circ \geq [\Theta_1 - \Theta_2] \geq 20^\circ \quad \text{and} \quad \Theta_1 \leq 135^\circ$$

$$\Theta_2 \geq 45^\circ$$

Table 1


BIT		MODE	RANGE
0	8	Prime	$45^\circ \rightarrow 135^\circ$ Variable
0	0		
0	1	Backup	$45^\circ \rightarrow 90^\circ$ Fixed
1	0	Backup	$90^\circ \rightarrow 135^\circ$ Fixed
1	1	Backup	$45^\circ \rightarrow 135^\circ$ Variable

Note: IRT Ref. Dwg. No. 1244 [MSFC Digital Controller (EL-1)]

ORIGINAL PAGE IS
OF POOR QUALITY

SCAN ENCODER

ORIGINAL PAGE IS
OF POOR QUALITY

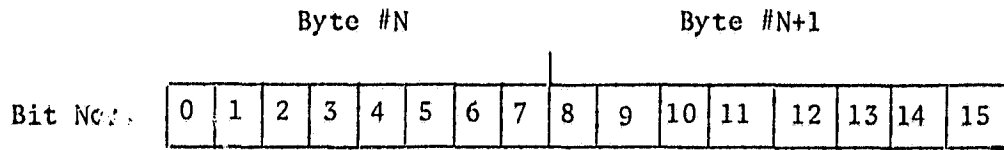


	Byte #N	Byte #N+1
Used in HRM formats #2 and #3 only	11	12
	35	36
	59	60
	83	84
	109	110
	133	134
	157	158
	181	182

	<u>Bit #</u>	<u>Function</u>	<u>State Definition</u>
	1	PARITY	ODD PARITY
	2	ENCODER FAIL	"1" = FAIL "0" = NORMAL
	3	MOTOR FAIL	"1" = FAIL "0" = NORMAL
See Note {	4	DATA 2	"1" = 90°
	5	DATA 3	"1" = 45°
	6	DATA 4	"1" = 22°30' or 22.5°
	7	DATA 5	"1" = 11°15' or 11.25°
	8	DATA 6	"1" = 5°37'30" or 5.625°
	9	DATA 7	"1" = 2°48'45" or 2.813°
	10	DATA 8	"1" = 1°24'22" or 1.406°
	11	DATA 9	"1" = 0°42'11" or 0.7031°
	12	DATA 10	"1" = 0°21'05" or 0.3515°
	13	DATA 11	"1" = 0°10'32" or 0.1757°
	14	DATA 12	"1" = 0°05'16" or 0.0878°
	15	DATA 13	"1" = 0°02'38" or 0.0439°
	16	DATA 14 - LSB	"1" = 0°01'19" or 0.0219°

Note: DATA 2 → DATA 8 are used for scan limit control in EL-1 electronics --
DATA 8 becomes the LSB of the 7-bit word (1.406° LSB). DATA 1 is not used.

DETECTOR DATA

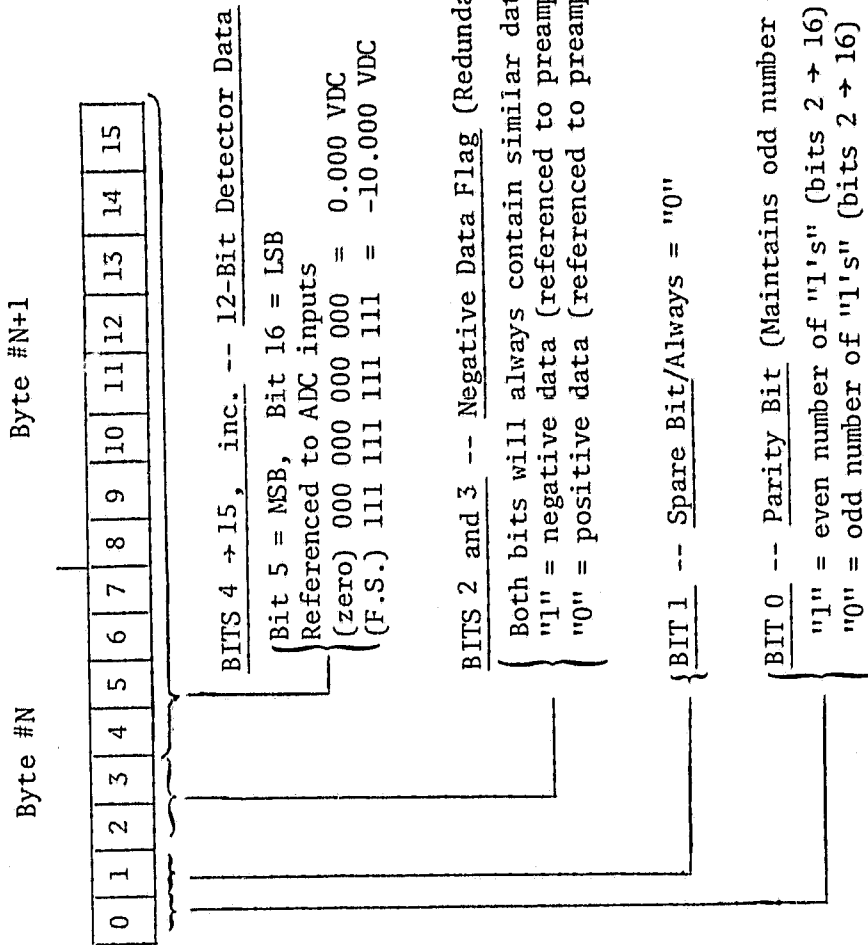

ORIGINAL PAGE IS
OF POOR QUALITY

STATE VECTOR

ORIGINAL PAGE 15
OF POOR QUALITY

		BYTE #103	BYTE #104
Minor Frame	0	OP CODE	ID FIELD
" "	1	TBD	TBD
" "	2	TBD	TBD
	↓	Op code is fixed for both formats	
	↓		
	↓		
	↓		
	↓		
	↓		
Minor Frame	30	TBD	TBD
	31		

Ref: IIA, Table TBD
IRT Ref. Dwg. No. 1243

- Notes:
1. Data will be in ARIES M50 form (31 words).
 2. Minor frame #31 will contain all zeros.